

# Statement of Verification

BREG EN EPD No.: 000277 Issue 05

This is to verify that the

**Environmental Product Declaration** provided by:

Qatar Steel Company FZE (member of UK CARES)

is in accordance with the requirements of:

EN 15804:2012+A2:2019

and

**BRE Global Scheme Document SD207** 

This declaration is for:

Carbon Steel Reinforcing Bar (secondary production route)

# **Company Address**

Qatar Steel Company FZE Jebel Ali Free Zone P.O. Box 18255 Dubai United Arab Emirates





Emma Baker

09 June 2023

17 January 2020

15 May 2026

Expiry Date

Date of First Issue



This Statement of Verification is issued subject to terms and conditions (for details visit  $\underline{www.greenbooklive.com/terms}.$ 

To check the validity of this statement of verification please, visit <a href="https://www.greenbooklive.com/check">www.greenbooklive.com/check</a> or contact us.

BRE Global Ltd., Garston, Watford WD25 9XX.

T: +44 (0)333 321 8811 F: +44 (0)1923 664603 E: <u>Enquiries@breglobal.com</u>





# **Environmental Product Declaration**

**EPD Number: 000277** 

# **General Information**

EPD Programme Operator	Applicable Product Category Rules							
BRE Global Watford, Herts WD25 9XX United Kingdom	BRE Environmental Profiles 2013 Product Category Rules for Type III environmental product declaration of construction products to EN 15804+A2 PN 514 Rev 3.0							
Commissioner of LCA study	LCA consultant/Tool							
UK CARES Pembroke House 21 Pembroke Road Sevenoaks Kent, TN13 1XR UK	UK CARES EPD Tool SPHERA SOLUTIONS UK LIMITED The Innovation Centre Warwick Technology Park, Gallows Hill, Warwick, Warwickshire, CV34 6UW www.sphera.com							
Declared/Functional Unit	Applicability/Coverage							
1 tonne of carbon steel reinforcing bars manufactured by the secondary (scrap-based) production route as used within concrete structures for a commercial building.	Manufacturer-specific product.							
EPD Type	Background database							
Cradle to Gate with options	GaBi							
Demonstra	ation of Verification							
CEN standard EN 15	5804 serves as the core PCR <sup>a</sup>							
Independent verification of the declara	ation and data according to EN ISO 14025:2010 ☑ External							
·								

a: Product category rules b: Optional for business-to-business communication; mandatory for business-to-consumer communication (see EN ISO 14025:2010, 9.4)

### Comparability

Pat Hermon

Environmental product declarations from different programmes may not be comparable if not compliant with EN 15804:2012+A2:2019. Comparability is further dependent on the specific product category rules, system boundaries and allocations, and background data sources. See Clause 5.3 of EN 15804:2012+A2:2019 for further guidance



### Information modules covered

	Produc	.+	Const	ruction				Use sta	ige			End-of-life				Benefits and loads beyond
	rioduc	·L	Construction		Related to the building fabric				ted to uilding	Ena-or-line				the system boundary		
<b>A</b> 1	A2	А3	A4	<b>A5</b>	B1	B2	В3	B4	B5	В6	В7	C1	C2	C3	C4	D
Raw materials supply	Transport	Manufacturing	Transport to site	Construction – Installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstruction demolition	Transport	Waste processing	Disposal	Reuse, Recovery and/or Recycling potential
$\overline{\checkmark}$	$\overline{\mathbf{V}}$	$\overline{\checkmark}$		$\overline{\mathbf{A}}$	$\overline{\checkmark}$	$\overline{\checkmark}$	$\overline{\checkmark}$	$\overline{\checkmark}$	$\overline{\mathbf{V}}$	$\overline{\mathbf{A}}$	$\overline{\checkmark}$	$\overline{\checkmark}$	$\overline{\checkmark}$	$\overline{\checkmark}$	$\overline{\mathbf{Q}}$	$\square$

Note: Ticks indicate the Information Modules declared.

# **Manufacturing site**

Qatar Steel Company FZE (member of UK CARES)

Jebel Ali Free Zone P.O. Box 18255 Dubai United Arab Emirates

# **Construction Product:**

# **Product Description**

Reinforcing steel bar (according to product standards listed in Sources of Additional Information) that is obtained from scrap, melted in an Electric Arc Furnace (EAF) followed by hot rolling.

The declared unit is 1 tonne of carbon steel reinforcing bars as used within concrete structures for a commercial building.



### **Technical Information**

Property	Value, Unit
Production route	EAF
Density	7850 kg/m <sup>3</sup>
Modulus of elasticity	200000 N/mm <sup>2</sup>
Weldability (Ceq)	max 0.50 %
Yield strength (as per BS 4449:2005+A3:2016)	min 500 N/mm <sup>2</sup> – max 650 N/mm <sup>2</sup>
Tensile strength (as per BS 4449:2005+A3:2016)	min 540 N/mm² (Tensile strength/Yield Strength ≥ 1.08)
Agt (% total elongation at maximum force as per BS 4449:2005+A3:2016)	min 5 %
Surface geometry (Relative rib area, f <sub>R</sub> as per BS 4449:2005+A3:2016)	min 0.040 for Bar Size >6mm & ≤12mm & min 0.056 for Bar size>12
Re-bend test (as per BS 4449:2005+A3:2016)	Pass
Fatigue test (as per BS 4449:2005+A3:2016)	Pass
Recycled content (as per ISO 14021:2016/Amd:2021)	54.2 %

# **Main Product Contents**

Material/Chemical Input	%
Fe	97
C, Mn, Si, V, Ni, Cu, Cr, Mo and others	3

# **Manufacturing Process**

Scrap metal is melted in an electric arc furnace to obtain liquid steel. This is then refined to remove impurities and alloying additions can be added to give the required properties.


Hot metal (molten steel) from the EAF is then cast into steel billets before being sent to the rolling mill where they are rolled and shaped to the required dimensions for the finished bars and coils of reinforcing steel.

The products are packed with steel wire or straps to bind the products, either of the steel ties and products do not include any biogenic materials.



### **Process flow diagram**



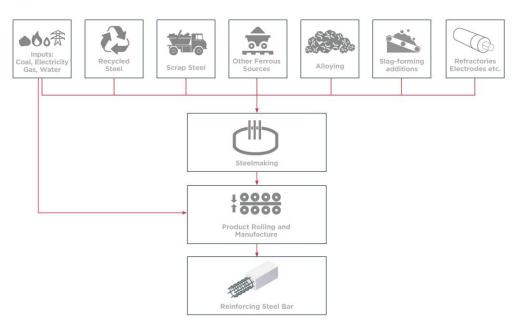

#### **Construction Installation**

Processing and proper use of reinforcing steel products depends on the application and should be made in accordance with generally accepted practices, standards and manufacturing recommendations.

During transport and storage of reinforcing steel steel products the usual requirement for securing loads is to be observed.

#### **Use Information**

The composition of the reinforcing steel products does not change during use.

Reinforcing steel products do not cause adverse health effects under normal conditions of use.

No risks to the environment and living organisms are known to result from the mechanical destruction of the reinforcing steel product itself.

#### **End of Life**

Reinforcing steel products are not reused at end of life but can be recycled to the same (or higher/lower) quality of steel depending upon the metallurgy and processing of the recycling route.

It is a high value resource, so efforts are made to recycle steel scrap rather than disposing of it at EoL. A recycling rate of 92% is typical for reinforcing reinforcing steel products



# **Life Cycle Assessment Calculation Rules**

# **Declared unit description**

The declared unit is 1 tonne of carbon steel reinforcing bars manufactured by the secondary (scrap-based) production route as used within concrete structures for a commercial building (i.e. 1 tonne in use, accounting for losses during fabrication and installation, not 1 tonne as produced).

# System boundary

The system boundary of the EPD follows the modular design defined by EN 15804+A2. This is a cradle to gate – with all options EPD and thus covers all modules from A1 to C4 and includes module D as well.

Impacts and aspects related to losses/wastage (i.e. production, transport and waste processing and end-of-life stage of lost waste products and materials) are considered in the modules in which the losses/wastage occur.

Once steel scrap has been collected for recycling it is considered to have reached the end of waste state.

# Data sources, quality and allocation

Data Sources: Manufacturing data of the period 01/01/2021-31/12/2021 has been provided by Qatar Steel Company FZE (member of UK CARES).

The selection of the background data for electricity generation is in line with the BRE Global PCR. Country or region specific power grid mixes are selected from GaBi 2021 databases (Sphera 2021); thus, consumption grid mix of UAE has been selected to suit specific manufacturing location.

Data Quality: Data quality can be described as good. Background data are consistently sourced from the GaBi 2021 databases (Sphera 2021). The primary data collection was thorough, considering all relevant flows and these data have been verified by UK CARES.

Data quality level and criteria of the UN Environment Global Guidance on LCA database development:

Geographical Representativeness : Good
Technical Representativeness : Very good
Time Representativeness : Good

Allocation: Mill scale is produced as co-product from the steel rolling process. Impacts are allocated between the steel and the mill scale based on economic value. The revenue generated from mill scale is 0.14%, which is less than 1% in relation to the product based on current market prices, this co-products is of definite value and are freely/readily traded in reality. For this reason, economic allocation has been applied to the processes where this co-product arise.

Production losses of steel during the production process are recycled in a closed loop offsetting the requirement for external scrap. Specific information on allocation within the background data is given in the GaBi datasets documentation (/GaBi 6 2021/)

#### **Cut-off criteria**

On the input side all flows entering the system and comprising more than 1% in total mass or contributing more than 1% to primary energy consumption are considered. All inputs used as well as all process-specific waste and process emissions were assessed. For this reason, material streams which were below 1% (by mass) were captured as well. In this manner the cut-off criteria according to the BRE guidelines are fulfilled.

The mass of steel wire or strand used for binding the product is less than 1 % of the total mass of the product.



# **LCA Results**

(MND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

	escribing enviro				r = iriaioat	or riot asc	, , , , , , , , , , , , , , , , , , ,	O = aggi	egatea)
T dramotore de	oornoning on the		GWP-	GWP-	GWP-	GWP-	ODP	AP	EP-
			total	fossil	biogenic	luluc	05.	/ "	freshwate
			kg CO <sub>2</sub>	kg CO <sub>2</sub>	kg CO <sub>2</sub>	kg CO <sub>2</sub>	kg CFC11	mol H⁺	kg (PO <sub>4</sub> ) <sup>3-</sup>
	Daniera danial anna bi	۸.4	eq	eq	eq	eq	eq	eq	eq
	Raw material supply	A1	1.25E+03	1.25E+03	1.7	0.805	6.33E-12	3.30	1.53E-03
Product stage	Transport	A2	0.142	0.141	-1.32E-04	0.001	1.76E-17	1.08E-03	3.68E-07
	Manufacturing	A3	193	193	0.156	0.036	2.30E-13	4.59	5.26E-05
	Total (of product stage)	A1-3	1.44E+03	1.44E+03	1.86	0.842	6.56E-12	7.89	1.58E-03
Construction	Transport	A4	16.8	16.7	-0.021	0.137	2.14E-15	0.049	4.97E-05
process stage	Construction	A5	157	156	0.201	0	7.11E-13	0.923	1.78E-04
	Use	B1	0	0	0	0	0	0	0
	Maintenance	B2	0	0	0	0	0	0	0
	Repair	В3	0	0	0	0	0	0	0
Use stage	Replacement	B4	0	0	0	0	0	0	0
	Refurbishment	B5	0	0	0	0	0	0	0
	Operational energy use	B6	0	0	0	0	0	0	0
	Operational water use	B7	0	0	0	0	0	0	0
%92 Recycling / %8	B Landfill Scenario	'							
	Deconstruction,	C1	2.15	2.15	0.003	4.93E-05	2.48E-16	0.003	4.10E-07
	demolition								
End of life	Transport Waste processing	C2 C3	40.6 0	40.3 0	-0.046 0	0.312	5.10E-15 0	0.178	1.14E-04 0
	Disposal	C4	1.18	1.21	-0.035	0.004	4.70E-15	0.009	2.03E-06
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-592	-593	1.03	-0.014	2.77E-12	-1.64	-1.02E-04
100% Lanfill Scena	rio								
	Deconstruction, demolition	C1	2.15	2.15	0.003	4.93E-05	2.48E-16	0.003	4.10E-07
End of life	Transport	C2	1.88	1.86	-0.002	0.015	2.38E-16	0.007	5.53E-06
Life of life	Waste processing	СЗ	0	0	0	0	0	0	0
	Disposal	C4	14.7	15.1	-0.439	0.044	5.87E-14	0.108	2.54E-05
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	1.42E+03	1.42E+03	-2.47	0.033	-6.64E-12	3.92	2.45E-04
100% Recycling Sc	enario								
	Deconstruction, demolition	C1	2.15	2.15	0.003	4.93E-05	2.48E-16	0.003	4.10E-07
End of life	Transport	C2	43.9	43.6	-0.049	0.338	5.53E-15	0.192	1.23E-04
	Waste processing	C3	0	0	0	0	0	0	0
	Disposal	C4	0	0	0	0	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-766	-768	1.34	-0.018	3.59E-12	-2.12	-1.33E-04

GWP-total = Global warming potential, total; GWP-fossil = Global warming potential, fossil; GWP-biogenic = Global warming potential, biogenic; GWP-luluc = Global warming potential, land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, accumulated exceedance; and EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment



Parameters de	escribing enviro	nment	al impac	ts					
			EP- marine	EP- terrestrial	POCP	ADP- mineral &metals	ADP- fossil	WDP	PM
			kg N eq	mol N eq	kg NMVOC eq	kg Sb eq	MJ, net calorific value	m <sup>3</sup> world eq	disease incidenc
	Raw material supply	A1	3.47E-04	7.96	2.57	1.29E-04	1.11E+04	-15.0	4.38E-05
	Transport	A2	3.47E-04	3.84E-03	0.001	9.89E-09	1.86	0.001	1.41E-08
Product stage	Manufacturing	А3	0.306	3.34	1.07	9.21E-06	2.40E+03	37.0	3.62E-05
	Total (of product stage)	A1-3	0.307	11.3	3.64	1.38E-04	1.35E+04	22.0	8.00E-0
Construction	Transport	A4	0.022	0.248	0.044	1.27E-06	223	0.145	2.72E-07
process stage	Construction	A5	0.122	1.33	0.410	1.51E-05	1.52E+03	8.65	9.15E-06
	Use	B1	0	0	0	0	0	0	0
	Maintenance	B2	0	0	0	0	0	0	0
	Repair	В3	0	0	0	0	0	0	0
Use stage	Replacement	B4	0	0	0	0	0	0	0
ŭ	Refurbishment	B5	0	0	0	0	0	0	0
	Operational energy use	В6	0	0	0	0	0	0	0
	Operational water use	B7	0	0	0	0	0	0	0
%92 Recycling / %8									
	Deconstruction,	C1	0.001	0.013	0.003	7.01E-08	28.3	0.005	1.89E-08
	demolition								
End of life	Transport Waste processing	C2 C3	0.085	0.940	0.179	2.97E-06 0	536	0.334	1.39E-0
	Disposal	C4	0.002	0.025	0.007	1.14E-07	16.0	0.130	1.07E-0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-0.340	-3.68	-1.140	1.27E-05	-4.32E+03	12.2	-2.14E-0
100% Lanfill Scena	rio								
	Deconstruction, demolition	C1	0.001	0.013	0.003	7.01E-08	28.3	0.005	1.89E-0
End of life	Transport	C2	0.003	0.035	0.006	1.42E-07	24.8	0.016	3.43E-08
End of me	Waste processing	СЗ	0	0	0	0	0	0	0
	Disposal	C4	0.028	0.307	0.085	1.43E-06	201	1.62	1.34E-06
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	0.814	8.82	2.72	-3.04E-05	1.04E+04	-29.2	5.12E-0
100% Recycling So	enario								
	Deconstruction, demolition	C1	0.001	0.013	0.003	7.01E-08	28.3	0.005	1.89E-08
End of life	Transport	C2	0.092	1.02	0.194	3.22E-06	581	0.362	1.50E-06
	Waste processing	C3	0	0	0	0	0	0	0
	Disposal	C4	0	0	0	0	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-0.440	-4.77	-1.47	1.64E-05	-5.60E+03	15.8	-2.77E-0

EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment;

EP-terrestrial = Eutrophication potential, accumulated exceedance;

POCP = Formation potential of tropospheric ozone;
ADP-mineral&metals = Abiotic depletion potential for non-fossil resources;

ADP-fossil = Depletion potential of the stratospheric ozone layer; WDP = Water (user) deprivation potential, deprivation-weighted water consumption; and PM = Particulate matter.



(MND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

Parameters de	escribing enviro	nmen	tal impact	S			
			IRP	ETP-fw	HTP-c	HTP-nc	SQP
			kBq U <sup>235</sup> eq	CTUe	CTUh	CTUh	dimensionless
	Raw material supply	A1	18.8	1.53E-03	1.47E-06	2.17E-05	1640
5	Transport	A2	3.19E-04	3.68E-07	2.69E-11	1.53E-09	0.56
Product stage	Manufacturing	А3	0.178	5.26E-05	8.16E-08	1.88E-06	53.4
	Total (of product stage)	A1-3	19.0	1.58E-03	1.55E-06	2.36E-05	1.69E+03
Construction	Transport	A4	0.039	4.97E-05	3.25E-09	1.89E-07	76.5
process stage	Construction	A5	1.970	1.78E-04	1.52E-07	2.47E-06	201
	Use	B1	0	0	0	0	0
	Maintenance	B2	0	0	0	0	0
	Repair	В3	0	0	0	0	0
Use stage	Replacement	B4	0	0	0	0	0
, and the second second	Refurbishment	B5	0	0	0	0	0
	Operational energy use	В6	0	0	0	0	0
	Operational water use	B7	0	0	0	0	0
%92 Recycling / %8	B Landfill Scenario						
End of life	Deconstruction, demolition	C1	0.004	4.10E-07	5.02E-10	1.63E-08	0.077
	Transport	C2	0.092	1.14E-04	7.79E-09	4.56E-07	174
	Waste processing	C3	0	0	0	0	0
	Disposal	C4	0.018	2.03E-06	1.35E-09	1.49E-07	3.24
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	6.78	-1.02E-04	-9.41E-07	-3.21E-06	354
100% Lanfill Scena	rio						
	Deconstruction, demolition	C1	0.004	4.10E-07	5.02E-10	1.63E-08	0.077
End of life	Transport	C2	0.004	5.53E-06	3.61E-10	2.14E-08	8.51
	Waste processing	C3	0	0	0	0	0
	Disposal	C4	0.221	2.54E-05	1.69E-08	1.86E-06	40.5
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-16.2	2.45E-04	2.25E-06	7.68E-06	-847
100% Recycling Sc	enario						
	Deconstruction, demolition	C1	0.004	4.10E-07	5.02E-10	1.63E-08	0.077
End of life	Transport	C2	0.100	1.23E-04	8.44E-09	4.94E-07	189
	Waste processing	C3	0	0	0	0	0
	Disposal	C4	0	0	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	8.78	-1.33E-04	-1.22E-06	-4.16E-06	458

IRP = Potential human exposure efficiency relative to U235; ETP-fw = Potential comparative toxic unit for ecosystems; HTP-c = Potential comparative toxic unit for humans; HTP-nc = Potential comparative toxic unit for humans; and SQP = Potential soil quality index.



(MND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

			PERE	PERM	PERT	PENRE	PENRM	PENRT
			MJ	MJ	MJ	MJ	MJ	MJ
	Raw material supply	A1	1.73E+03	0	1.73E+03	1.12E+04	0	1.12E+04
5	Transport	A2	0.092	0	0.092	1.86	0	1.86
Product stage	Manufacturing	А3	240	0	240	2.40E+03	0	2.40E+03
	Total (of product stage)	A1-3	1.97E+03	0	1.97E+03	1.36E+04	0	1.36E+04
Construction	Transport	A4	12.4	0	12.4	223	0	223
process stage	Construction	A5	245	0	245	1.52E+03	0	1.52E+03
	Use	B1	0	0	0	0	0	0
	Maintenance	B2	0	0	0	0	0	0
	Repair	В3	0	0	0	0	0	0
Use stage	Replacement	B4	0	0	0	0	0	0
Ü	Refurbishment	B5	0	0	0	0	0	0
	Operational energy use	В6	0	0	0	0	0	0
	Operational water use	B7	0	0	0	0	0	0
%92 Recycling / 9	%8 Landfill Scenario							
End of life	Deconstruction, demolition	C1	0.098	0	0.098	28.3	0	28.3
	Transport	C2	28.4	0	28.4	537	0	537
	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	2.16	0	2.16	16.1	0	16.1
Potential benefits and loads beyond the system	Reuse, recovery, recycling potential	D	551	0	551	-4.37E+03	0	-4.37E+03
100% Landfill Sce	enario							
	Deconstruction, demolition	C1	0.098	0	0.098	28.3	0	28.3
End of life	Transport	C2	1.38	0	1.38	24.8	0	24.8
Life of file	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	27.0	0	27.0	201	0	201
Potential benefits and loads beyond the system	Reuse, recovery, recycling potential	D	-1.32E+03	0	-1.32E+03	1.05E+04	0	1.05E+04
100% Recycling	Scenario							
	Deconstruction, demolition	C1	0.098	0	0.098	28.3	0	28.3
End of life	Transport	C2	30.7	0	30.7	582	0	582
	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	0	0	0	0	0	0
Potential benefits and loads beyond the system	Reuse, recovery, recycling potential	D	714	0	714	-5.66E+03	0	-5.66E+03

PERE = Use of renewable primary energy excluding renewable primary energy used as raw materials;

PERM = Use of renewable primary energy resources used as raw materials;

PERT = Total use of renewable primary energy resources;

PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials;

PENRT = Total use of non-renewable primary energy resource



(MND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

			SM	RSF	NRSF	FW
			kg	MJ net calorific value	MJ net calorific value	m³
	Raw material supply	A1	0	0	0	-15.0
Draduat atawa	Transport	A2	0	0	0	0.001
Product stage	Manufacturing	А3	-661	0	0	37.0
	Total (of product stage)	A1-3	-661	0	0	22.0
Construction	Transport	A4	0	0	0	0.145
process stage	Construction	A5	0	0	0	8.65
	Use	B1	0	0	0	0
	Maintenance	B2	0	0	0	0
	Repair	В3	0	0	0	0
Use stage	Replacement	B4	0	0	0	0
	Refurbishment	B5	0	0	0	0
	Operational energy use	В6	0	0	0	0
	Operational water use	В7	0	0	0	0
%92 Recycling / %8	Landfill Scenario					
End of life	Deconstruction, demolition	C1	0	0	0	0.005
	Transport	C2	0	0	0	0.334
	Waste processing	C3	0	0	0	0
	Disposal	C4	0	0	0	0.130
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-259	0	0	12.2
100% Landfill Scena	rio					
	Deconstruction, demolition	C1	0	0	0	0.005
End of life	Transport	C2	0	0	0	0.016
	Waste processing	C3	0	0	0	0
	Disposal	C4	0	0	0	1.62
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	661	0	0	-29.2
100% Recycling Sce	nario					
	Deconstruction, demolition	C1	0	0	0	0.005
End of life	Transport	C2	0	0	0	0.362
	Waste processing	СЗ	0	0	0	0
	Disposal	C4	0	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-339	0	0	15.8

SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Net use of fresh water



LCA Results (continued)
(MND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

			LIVATO	NII DAID	ראים
			HWD	NHWD	RWD
			kg	kg	kg
	Raw material supply	A1	7.84E-07	12.4	0.209
Dun dan dan dan	Transport	A2	8.40E-11	2.66E-04	2.23E-06
Product stage	Manufacturing	А3	1.06E-07	0.563	0.003
	Total (of product stage)	A1-3	8.90E-07	13.0	0.212
Construction	Transport	A4	1.12E-08	0.033	2.70E-04
process stage	Construction	A5	1.13E-07	11.1	0.022
	Use	B1	0	0	0
	Maintenance	B2	0	0	0
	Repair	В3	0	0	0
Jse stage	Replacement	B4	0	0	0
•	Refurbishment	B5	0	0	0
	Operational energy use	В6	0	0	0
	Operational water use	В7	0	0	0
%92 Recycling / %8	Landfill Scenario				
End of life	Deconstruction,	C1	2.42E-10	0.006	3.10E-05
	demolition				
	Transport  Waste processing	C2 C3	2.58E-08 0	0.078	6.46E-04 0
	Disposal	C3	1.70E-09	80.1	1.68E-04
)	Біорозаі	04	1.702 00	00.1	1.002 04
otential benefits and bads beyond the ystem boundaries	Reuse, recovery, recycling potential	D	5.30E-07	-8.58	0.071
00% Landfill Scena	rio				
	Deconstruction, demolition	C1	2.42E-10	0.006	3.10E-05
End of life	Transport	C2	1.25E-09	0.004	3.00E-05
	Waste processing	СЗ	0	0	0
	Disposal	C4	2.13E-08	1.00E+03	0.002
Potential benefits and bads beyond the system boundaries	Reuse, recovery, recycling potential	D	-1.27E-06	20.5	-0.170
100% Recycling Sce	enario				
	Deconstruction, demolition	C1	2.42E-10	0.006	3.10E-05
End of life	Transport	C2	2.79E-08	0.085	6.99E-04
	Waste processing	СЗ	0	0	0
	Disposal	C4	0	0	0
Potential benefits and oads beyond the system boundaries	Reuse, recovery, recycling potential	D	6.87E-07	-11.1	0.092

HWD = Hazardous waste disposed; NHWD = Non-hazardous waste disposed; RWD = Radioactive waste disposed



			CRU	MFR	MER	EE	Biogenic carbon (product)	Biogenic carbon (packaging)
			kg	kg	kg	MJ per energy carrier	kg C	kg C
	Raw material supply	A1	0	0	0	0	0	0
Product stage	Transport	A2	0	0	0	0	0	0
Toddel stage	Manufacturing	A3	0	0	0	0	0	0
	Total (of product stage)	A1-3	0	0	0	0	0	0
Construction	Transport	A4	0	0	0	0	0	0
process stage	Construction	A5	0	-18.8	0	0	0	0
	Use	B1	0	0	0	0	0	0
	Maintenance	B2	0	0	0	0	0	0
	Repair	ВЗ	0	0	0	0	0	0
Use stage	Replacement	B4	0	0	0	0	0	0
-	Refurbishment	B5	0	0	0	0	0	0
	Operational energy use	B6	0	0	0	0	0	0
	Operational water use	В7	0	0	0	0	0	0
%92 Recycling / %8	Landfill Scenario							
End of life	Deconstruction, demolition	C1	0	-920	0	0	0	0
	Transport	C2	0	0	0	0	0	0
Lita of file	Waste processing	СЗ	0	0	0	0	0	0
	Disposal	C4	0	0	0	0	0	0
Potential benefits and oads beyond the system boundaries	Reuse, recovery, recycling potential	D	0	0	0	0	0	0
100% Landfill Scena	rio							
	Deconstruction, demolition	C1	0	0	0	0	0	0
End of life	Transport	C2	0	0	0	0	0	0
	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	0	0	0	0	0	0
Potential benefits and oads beyond the system boundaries	Reuse, recovery, recycling potential	D	0	0	0	0	0	0
100% Recycling Sce	nario							
	Deconstruction, demolition	C1	0	-1.00E+03	0	0	0	0
End of life	Transport	C2	0	0	0	0	0	0
	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	0	0	0	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	0	0	0	0	0	0

CRU = Components for reuse; MFR = Materials for recycling MER = Materials for energy recovery; EE = Exported Energy



# Scenarios and additional technical information

Scenarios and addi	tional technical information										
Scenario	Parameter	Units	Results								
	transported on to the construction site, including provision of all materials transport distance for rolled steel to fabricators and road transport distance construction forms to site are assumed to be 100 km and 250 km, respec	they are converted into constructional steel forms suitable for the installation site, then transported on to the construction site, including provision of all materials and products. Road transport distance for rolled steel to fabricators and road transport distance for steel construction forms to site are assumed to be 100 km and 250 km, respectively. Only the one-way distance is considered as it is assumed that the logistics companies will									
A4 – Transport to the building site	Truck trailer - Fuel	litre/km	1.56								
	Distance	km	350								
	Capacity utilisation (incl. empty returns)	%	85								
	Bulk density of transported products	kg/m³	7850								
The fabrication process is a relatively simple unit process and accounts for the transformation of the rolled steel product into construction steel forms. The operations in this unit process primarily cutting and welding. As such, other inputs to the process include electricity, there energy, and cutting gases. Other outputs of this process are steel scrap and wastewater (where applicable).  Fabrication into structural steel products and installation in the building; including provision all materials, products, and energy, as well as waste processing up to the end-of-waste st disposal of final residues during the construction stage. Installation of the fabricated product into the building is assumed to result in 10% wastage (determined based on typical install losses reported by the WRAP Net Waste Tool [WRAP 2017]). It is assumed that fabrication requires 15.34 kWh/tonne finished product, and that there is a 2% wastage associated with process.											
	Ancillary materials for installation - Waste material from fabrication, losses per tonne of construction steel forms	%	2								
	Energy Use - Energy per tonne required to fabricate construction steel forms	kWh	15.34								
	Waste materials from installation wastage	%	10								
B2 – Maintenance	No maintenance required										
B3 – Repair	No repair process required										
B4 – Replacement	No replacement considerations required										
B5 – Refurbishment	No refurbishment process required										
Reference service life	Reinforcing steel products are used in the main building structure so the reference service life will equal the lifetime of the building. The Concrete Society follows the definitions provided in BS EN 1990, which specifies "building structures and other common structures" as having a lifetime of 50 years (The Concrete Society, n.d.; BSI, 2005). On this basis, the RSL for this EPD is assumed to be 50 years.										
B6 – Use of energy; B7 – Use of water	No water or energy required during use stage related to the operation of	the buildin	g								



C1 to C4 End of life,	The end-of-life stage starts when the construction product is replaced, dismantled or deconstructed from the building or construction works and does not provide any further function. The recovered steel is transported for recycling while a small portion is assumed to be unrecoverable and remains in the rubble which is sent to landfill. 92% of the reinforcing steel is assumed to be recycled and 8% is sent to landfill [STEELCONSTRUCTION.INFO 2012]. Once steel scrap is generated through the deconstruction activities on the demolition site it is considered to have reached the "end of waste" state. No further processing is required so there are no impacts associated with this module. Hence no impacts are reported in module C3.		
	Waste for recycling - Recovered steel from crushed concrete	%	92
	Waste for energy recovery - Energy recovery is not considered for this study as most end of life steel scrap is recycled, while the remainder is landfilled	-	-
	Waste for final disposal - Unrecoverable steel lost in crushed concrete and sent to landfill	%	8
	Portion of energy assigned to rebar from energy required to demolish building, per tonne	MJ	24
	Transport to waste processing by Truck - Fuel consumption	litre/km	1.56
	Transport to waste processing by Truck – Distance	km	463
	Transport to waste processing by Truck – Capacity utilisation	%	85
	Transport to waste processing by Truck – Density of Product	kg/m³	7850
	Transport to waste processing by Container ship - Fuel consumption	litre/km	0.0041
	Transport to waste processing by Container ship - Distance	km	158
	Transport to waste processing by Container ship – Capacity utilisation	%	50
	Transport to waste processing by Container ship – Density of Product	kg/m³	7850
Module D	It is assumed that 92% of the steel used in the structure is recovered for recycling, while the remainder is landfilled. "Benefits and loads beyond the system boundary" (module D) accounts for the environmental benefits and loads resulting from net steel scrap that is used as raw material in the EAF and that is collected for recycling at end of life. The balance between total scrap arisings recycled from fabrication, installation and end of life and scrap consumed by the manufacturing process (internally sourced scrap is not included in this calculation). These benefits and loads are calculated by including the burdens of recycling and the benefit of avoided primary production.  This study is concerned with the secondary production route and more scrap is required as input to the system than is recovered at end of life. The net effect of this is that module D mainly models the burdens associated with the scrap input (secondary material) to the steelmaking process.		
	The resulting scrap credit/burden is calculated based on the global "value" (/worldsteel 2011).	e oi sciap	арргоасп
	Recycled Content	kg	977
	Re-used Content	kg	0
	Recovered for recycling	kg	920
	Recovered for re-use	kg	0
	Recovered for energy	kg	0



# Summary, comments and additional information

### Interpretation

Scrap based reinforcing steel product of Qatar Steel Company FZE (member of UK CARES) is made via the EAF route. The bulk of the environmental impacts and primary energy demand is attributed to the manufacturing phase, covered by information modules A1-A3 of EN 15804+A2.

The interpretation of the results has been carried out considering the methodology- and data-related assumptions and limitations declared in the EPD. This interpretation section focuses on the environmental impact categories as well as the primary energy demand indicators only.

#### Global Warming Potential (GWP)

The majority of the life cycle GWP impact occurs in the production phase (A1-A3). A1-A3 impacts account for 86.89% overall life cycle impacts for this category. The most significant contributions to production phase impacts are: the upstream production of raw materials used in the steelmaking process, generation/supply of electricity and the production/use of fuels on site. Fabrication, installation and the end-of-life processes covered in C1-C4 make a minimal contribution to GWP. For overall climate change impacts, carbon dioxide emissions account for the majority of impacts with methane being the second most significant contributor.

#### Ozone Depletion Potential (ODP)

The majority of impacts are associated with the production phase (A1-3). Significant contributions to production phase impact come from the emission of ozone depleting substances during the upstream production of raw materials/preproducts as well as those arising from electricity production. Module D shows a very small credit even though scrap burdens are being assessed in this phase. This is explained because ODP emissions are linked to grid electricity production used.

### Acidification Potential (AP)

Acidification potential is generally driven by the production of sulphur dioxide and nitrogen oxides through the combustion of fossil fuels, particularly coal and crude oil products. The majority of the lifecycle AP impact occurs in the production phase (A1-A3), similar to GWP. The major contributors to production phase AP impacts comes from energy resources used in the production of the raw materials and pre-products for the steelmaking process and from transportation. Fabrication, installation and the end-of-life processes classed under C1-C4 make minimal contributions.

### Eutrophication Potential (EP)

Eutrophication is driven by nitrogen and phosphorus containing emissions and as with GWP and AP is often strongly linked with the use of fossil fuels. The major eutrophication impacts occur in the production phase (A1-A3). Significant contributions to production phase impact comes from the production of raw materials and transport. Fabrication, installation and the end-of-life processes classed under C1-C4 again make minimal contributions.

### Photochemical Ozone Creation Potential (POCP)

POCP tends to be driven by emissions of carbon monoxide, nitrogen oxides (NOx), sulphur dioxide and NMVOCs. The production phase is the dominant phase of the lifecycle with regards to POCP impacts. Again, these are all emissions commonly associated with the combustion of fuels. Significant contributors to POCP are the upstream production of raw materials/pre-products and transport, directly linked to fossil fuel combustion. It should be noted that the impacts for steel recycling in module D is almost of the same magnitude as the production phase impacts.



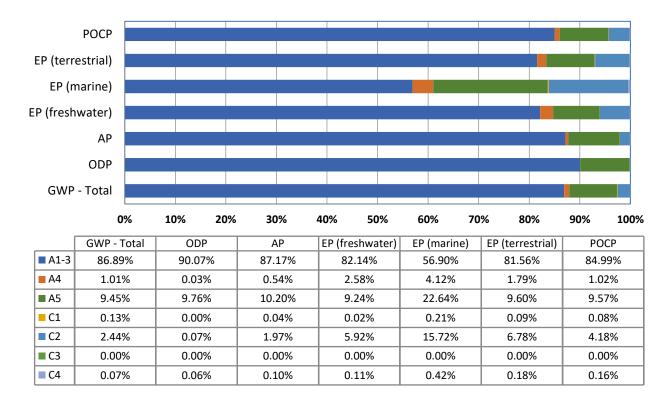


Figure 1 - shows the relative contribution of each life cycle stage to different environmental indicators for the carbon steel reinforcing bars manufactured by the Direct Reduced Iron production route

### References

BSI. Sustainability of construction works – Environmental product declarations – Core rules for the product category of construction products. BS EN 15804:2012+A2:2019. London, BSI, 2019.

BSI. Environmental labels and declarations – Type III Environmental declarations – Principles and procedures. BS EN ISO 14025:2010 (exactly identical to ISO 14025:2006). London, BSI, 2010.

BSI. Environmental management – Life cycle assessment – Principles and framework. BS EN ISO BS EN ISO 14040:2006+A1:2020. London, BSI, 2020.

BSI. Environmental management – Life cycle assessment – requirements and guidelines. BS EN ISO 14044:2006+A2:2020. London, BSI, 2020.

Demolition Energy Analysis of Office Building Structural Systems, Athena Sustainable Materials Institute, 1997

Sphera Solutions GmbH; GaBi Software System and Database for Life Cycle Engineering, Sphera Solution GmbH, Leinfelden-Echterdingen, 2021.

GaBi 10, Content Version 2021.2: Documentation of GaBi 10, Content Version 2021.2: Software-System and Database for Life Cycle Engineering. Copyright, TM. Stuttgart, Echterdingen, 2021. (http://documentation.gabi-software.com/)

International Energy Agency, Energy Statistics 2013. http://www.iea.org

Kreißig, J. und J. Kümmel (1999): Baustoff-Ökobilanzen. Wirkungsabschätzung und Auswertung in der Steine-Erden-Industrie. Hrsg. Bundesverband Baustoffe Steine + Erden e.V.



U,S, Geological Survey, Mineral Commodity Summaries, Iron and Steel Slag, January 2014

SteelConstruction.info; The recycling and reuse survey, 2012 http://www.steelconstruction.info/The\_recycling\_and\_reuse\_survey

Sustainability of construction works - Environmental product declarations - Methodology for selection and use of generic data; German version CEN/TR 15941

REGULATION (EU) No 305/2011 OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 9 March 2011 laying down harmonised conditions for the marketing of construction products and repealing Council Directive 89/106/EEC

CARES SCS Sustainable Constructional Steel Scheme v9 – Operational assessment schedule - <a href="https://www.carescertification.com/certified-companies/search">https://www.carescertification.com/certified-companies/search</a> - Certificate number of conformance to SCS v9 at the time of LCA study – 1687.

CARES SRC Steel for the Reinforcement of Concrete Scheme. Appendix 1 – Quality and operations assessment schedule for carbon steel bars for the reinforcement of concrete including inspection and testing requirements - <a href="https://www.carescertification.com/certified-companies/search">https://www.carescertification.com/certified-companies/search</a> - Certificate number of conformance to BS4449 at the time of LCA study – 070702

CARES - SSRC Appendix-1 Weldable reinforcing steel bars, coils and decoiled products - <a href="https://www.carescertification.com/certified-companies/search">https://www.carescertification.com/certified-companies/search</a> - Certificate number of conformance to SS 560:2016 at the time of LCA study – 220207

CARES SRC Steel for the Reinforcement of Concrete Scheme. Appendix CP&AS 24 - Quality and operations assessment schedule for Hong Kong Standard (CS2:2012) Steel Reinforcing Bars for the Reinforcement of Concrete - <a href="https://www.carescertification.com/certified-companies/search">https://www.carescertification.com/certified-companies/search</a> - Certificate number of conformance to CS2:2012 at the time of LCA study – 220208

BS 4449:2005+A3:2016 Steel for the reinforcement of concrete. Weldable reinforcing steel. Bar, coil and decoiled product. Specification.

ASTM A615/A615M – 22 Standard Specification for Deformed and Plain Carbon-Steel Bars for Concrete Reinforcement.

ASTM A706/A706M – 22 - Standard Specification for Deformed and Plain Low-Alloy Steel Bars for Concrete Reinforcement.

CS2:2012 - Steel Reinforcing Bars for the Reinforcement of Concrete

SS 560:2016 - Specification for steel for the reinforcement of concrete – Weldable reinforcing steel – Bar, coil and decoiled product.

ISO 6935-2:2019 - Steel for the reinforcement of concrete - Part 2: Ribbed bars.