



# Environmental Product Declaration

## Statement of Verification

CARES EPD No.: 0045

Issue 01

This is to verify that the

## Environmental Product Declaration

Provided by:

Tianjin NTS Flourish Co., Ltd

Is in accordance with the requirements of:

ISO 14025:2010 and EN 15804:2012 + A2:2019/AC2021

and CARES PCR for Type III EPD of Semi-Finished and Finished Steel Products, February 2025

This declaration is for: 1 tonne of high tensile steel wire and strand products for the prestressing of concrete manufactured by the primary production route (iron ore)



## Company address:

No.1, No.1 Road, Northern Zone  
of Jinghai Economic  
Development Area  
Tianjin  
China



*Ladin Camci*

Signed for CARES

26 January 2026

First Issue Date

Ladin Camci

Operator

26 January 2026

Date of this Issue

25 January 2029

Expiry Date

The validity of this Environmental Product Declaration can be verified by contacting CARES on +44 (0)1732 450 000 or visiting CARES website <https://www.caresscertification.com/certification-schemes/environmental-product-declarations>.

CARES, Pembroke House, 21 Pembroke Road, Sevenoaks, Kent TN13 1XR



# Environmental Product Declaration

## Environmental Product Declaration

EPD Number: CARES EPD 0045

## General Information

<b>EPD Programme Operator</b>	CARES Pembroke House, 21 Pembroke Road, Sevenoaks, Kent, TN13 1XR UK <a href="http://www.carescertification.com">www.carescertification.com</a>
<b>Applicable Product Category Rules</b>	CARES Product Category Rules (PCR) for Type III Environmental Product Declaration (EPD) of Semi-Finished and Finished Steel Products, February 2025
<b>Commissioner of LCA study</b>	CARES Pembroke House, 21 Pembroke Road, Sevenoaks, Kent, TN13 1XR UK <a href="http://www.carescertification.com">www.carescertification.com</a>
<b>LCA consultant/Tool</b>	CARES EPD Tool version 3.0 SPHERA SOLUTIONS UK LIMITED The Innovation Centre Warwick Technology Park, Gallows Hill, Warwick, Warwickshire CV34 6UW UK <a href="http://www.sphera.com">www.sphera.com</a>
<b>Declared/Functional Unit</b>	1 tonne of high tensile steel wire and strand products for the prestressing of concrete manufactured by the primary production route (iron ore)
<b>Applicability/Coverage</b>	Manufacturer-specific product produced at a single plant of one manufacturer
<b>EPD Type</b>	Cradle to Gate with Modules C1-C4 and Module D
<b>Background database</b>	MLC (GaBi) Databases 2025.1 (Sphera, 2025)

## Demonstration of Verification

CEN standard EN 15804 serves as the core PCR <sup>a</sup>

Independent verification of the declaration and data according to EN ISO 14025:2010

Internal       External

(Where appropriate <sup>b</sup>) Third party verifier:

Dr Jane Anderson

a: Product category rules

b: Optional for business-to-business communication; mandatory for business-to-consumer communication (see EN ISO 14025:2010, 9.4)



# Environmental Product Declaration

## Comparability

Environmental product declarations from different programmes may not be comparable if not compliant with EN 15804:2012+A2:2019/AC2021. Comparability is further dependent on the specific product category rules, system boundaries and allocations, and background data sources. See Clause 5.3 of EN 15804:2012+A2:2019/AC2021 for further guidance

## Information modules covered

Product Stage			Construction Stage		Use Stage							End-of-life Stage				Benefits and loads beyond the system boundary
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Raw materials supply	Transport	Manufacturing	Transport to site	Construction – Installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Decconstruction demolition	Transport	Waste processing	Disposal	Reuse, Recovery and/or Recycling potential
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

Note: Checks indicate the Information Modules declared.

## Manufacturing site

Tianjin NTS Flourish Co., Ltd  
No.1, No.1 Road, Northern Zone of Jinghai Economic Development Area  
Tianjin  
China

## Construction Product:

### Product Description

Plain or indented high tensile steel wire for the prestressing of concrete is obtained by cold drawing of high carbon steel wire rods into various sizes (according to product standards listed in References) which are manufactured by hot rolling of continuously cast steel billets obtained from the blast furnace/basic oxygen furnace production route.

High tensile prestressed steel strand for the prestressing of concrete is obtained by winding multiple wires to form the strand in various sizes (according to the product standards listed in the references section of this EPD). Wires used for the manufacturing of the strand are obtained by cold drawing of high carbon steel feedstock coils produced by hot rolling of continuously cast steel billets obtained from the blast furnace/basic oxygen furnace production route.

High tensile prestressed steel wire and strand for the prestressing of concrete is used to provide tensile strength in reinforced concrete structural elements.

The declared unit is 1 tonne of high tensile steel wire and strand products for the prestressing of concrete manufactured by the primary production route (iron ore).



# Environmental Product Declaration

## Technical Information

Property	Value, Unit
Production route	Blast Furnace - BOF
Density	7810 kg/m <sup>3</sup>
Modulus of elasticity	195 GPa
Characteristic Value of 0.1% Proof Force Fp0.1 (as per BS 5896:2012; value depending on steel name and diameter of wire)	62.2 to 334 kN
Nominal Tensile strength (as per BS 5896:2012; value depending on steel name and diameter of wire)	1670 to 1860 MPa
Characteristic Value of Maximum Force Fm	92 to 379 kN
Agt (total minimum % elongation at maximum force as per BS 5896:2012) (with Lo ≥ 100mm for Wire; Lo ≥ 500mm for Strand)	min 3.5%
Maximum relaxation at 1000 h for initial force corresponding to 70% (as per BS 5896:2012)	min 2.5%
Recycled content (as per ISO 14021:2016/Amd:2021)	13.6 <sup>1)</sup>

1) CARES BF-BOF manufacturing route average including internal and external scrap

## Main Product Contents

Material/Chemical Input	%
Fe	97
C, Mn, Si, V, Ni, Cu, Cr, Mo and others	3

## Manufacturing Process

High tensile steel wire for prestressing applications is manufactured from high-carbon steel wire rods that are manufactured through the primary production route (iron ore). The rods undergo thorough cleaning and descaling to remove surface impurities, followed by cold drawing through a series of dies to achieve the required diameter and enhance tensile strength. After drawing, the wire is subjected to stress-relieving heat treatment under controlled tension to reduce residual stresses and improve relaxation characteristics.


High tensile steel strand for the prestressing of concrete, is produced by helically twisting multiple wires in a stranding machine. Following stranding, the product undergoes stress-relieving heat treatment under tension to stabilise mechanical properties and enhance relaxation performance.

The completed wires and strands (according to the product standards listed in the references section of this EPD) are subjected to rigorous quality control, including tensile strength verification, lay length measurement, and surface inspection, prior to coiling and dispatch for prestressing operations.

Finished wires and strands are coiled and packaged for transport, ensuring protection against corrosion and mechanical damage. Steel straps and ties used for the binding of packages do not include any biogenic materials. Wrapping paper and wooden wedge that contain biogenic material are used for the packaging and handling of the final products.

## Process flow diagram

PC-wire & strand manufacturing process

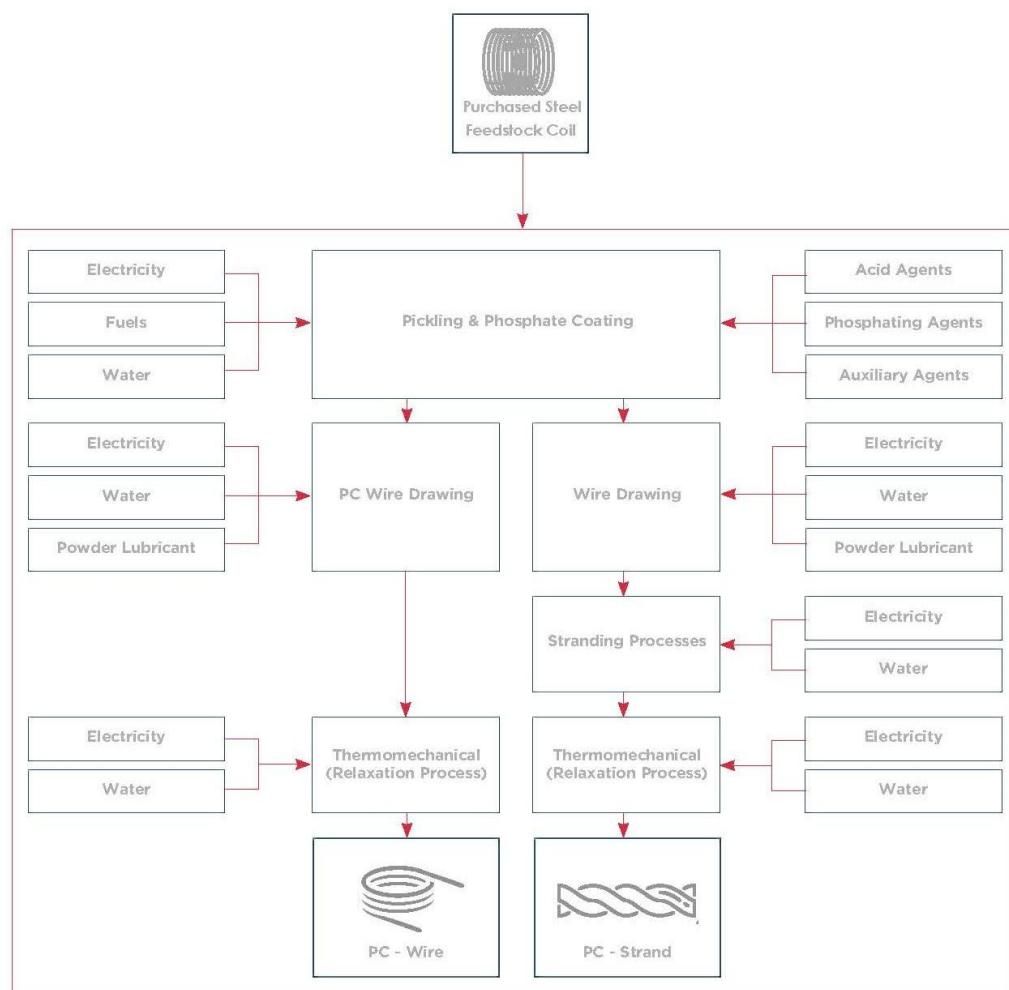

## Construction Installation

Processing and proper use of high tensile steel wire and strand products depends on the application and should be made in accordance with generally accepted practices, standards and manufacturing recommendations.

During transport and storage of high tensile steel wire and strand products the usual requirement for the special care for securing loads is to be observed.

## Use Information

The composition of the high tensile steel wire and strand products does not change during use.

High tensile steel wire and strand products do not cause adverse health effects under normal conditions of use.

No risks to the environment and living organisms are known to result from the mechanical destruction of the high tensile steel wire and strand products itself.



# Environmental Product Declaration

## End of Life

High tensile steel wire and strand products are not reused at end of life but can be recycled to the same (or higher/lower) quality of steel depending upon the metallurgy and processing of the recycling route.

It is a high value resource, so efforts are made to recycle steel scrap rather than disposing of it at EoL. A recycling rate of 92% is typical for high tensile steel wire and strand products.

## Life Cycle Assessment Calculation Rules

This EPD uses the "Cut-off by Classification" method, also known as the recycled content method. It assigns the environmental impacts of primary material production to the initial user. Recyclable materials enter the recycling process without burdens, and secondary materials only bear the impacts of recycling.

This method promotes recycling by making producers responsible for waste management. It supports a circular economy by reducing the environmental impacts of primary material production.

This approach follows ISO 14040 and ISO 14044 standards for Life Cycle Assessments.

The Life Cycle Impact Assessment (LCIA) has been carried out using the characterisation method described in EN 15804+A2. For all indicators the characterisation factors from the Environmental Footprint v3.1 (EF 3.1) was applied.

## Declared unit description

1 tonne of high tensile steel wire and strand products for the prestressing of concrete manufactured by the primary production route (iron ore).

## System boundary

The system boundary of the EPD follows the modular design defined by EN 15804:2012+A2:2019/AC2021. Type of this EPD is Cradle to Gate – with modules A1 to A3, modules C1-C4, and module D.

Impacts and aspects related to losses/wastage (i.e. production, transport and waste processing and end-of-life stage of lost waste products and materials) are considered in the modules in which the losses/wastage occur.

Once steel scrap has been collected for recycling it is considered to have reached the end of waste state.

## Data sources, quality and allocation

### Data Sources and Quality:

The selection of data and the data quality requirements have been provided according to the requirements of BS EN 15941:2024.

**Data Sources:** Manufacturing data of the high tensile steel strand products for the prestressing of concrete covering the period 01/01/2024 - 31/12/2024 has been provided by Tianjin NTS Flourish Co., Ltd operating on the geographical area noted in Manufacturing Site. High carbon steel wire rods used in the production of high tensile steel wire and strand for the prestressing of concrete were purchased from external suppliers which are using the primary production route (iron ore based). For these, generic data was used.

A brief description of technology and inputs for the product is given in Manufacturing Process and in simplified Process Flow Diagram.

The primary data collection was thorough, considering all relevant flows and these data were verified by CARES, including also the verification of mass balance, to ensure that data for all the inputs and outputs for the process over the period of data collection have been collected, and that the unit process data will comply with the cut-off rules of EN 15804:2012+A2:2019/AC2021. The EPD covers transport to, and end-of-life in China.

The selection of the background data for electricity generation is in line with the CARES PCR 2025. Country or region-specific power grid mixes are selected from MLC (GaBi) Databases 2025.1 (Sphera, 2025); thus, sub-national consumption grid mix of China – North has been selected to suit specific manufacturing location, and also for



# Environmental Product Declaration

fabrication, installation and demolishing location. The emission factor of carbon footprint of the applied sub-national grid mix of China – North in 0.847 kg CO<sub>2</sub> eq/kWh.

**Data Quality:** Background data is consistently sourced from the MLC (GaBi) Databases 2025.1 (Sphera, 2025). The primary data collection was thorough, considering all relevant flows and these data have been verified during the audit conducted by CARES in November 2025.

There isn't any data from different LCI/LCA databases are used considering that the overall consistency of the study is not adversely affected.

Schemes applied for data quality assessment was as per EN 15804:2012+A2:2019/AC2021, Annex E, Table E.1 — Data quality level and criteria of the UN Environment Global Guidance on LCA database development. No fair, poor or very poor data was found during the assessment of relevant data.

Data quality level and criteria of the UN Environment Global Guidance on LCA database development:

Geographical Representativeness	: Good
Technical Representativeness	: Very good
Time Representativeness	: Good

**Allocation:**

Mill scale is produced as co-products from the high strength steel wire and strand manufacturing process. Impacts are allocated between the steel and the mill scale based on economic value. The revenue generated from mill scale is less than 1% in relation to the product based on current market prices, this co-product is of definite value and are freely/readily traded in reality. For this reason, economic allocation has been applied to the processes where this co-product arises.

Production losses of steel during the production process are recycled in a closed loop offsetting the requirement for external scrap. Specific information on allocation within the background data is given in the MLC (GaBi) Databases 2025.1 (Sphera, 2025).

**Biogenic carbon accounting:**

Biogenic carbon is modelled on a dry-mass basis per EN 16449 with CO<sub>2</sub> = C × 44/12. Under the EN 15804 EF 3.1 configuration, characterization factors are -1 for CO<sub>2</sub> uptake and +1 for CO<sub>2</sub> release; module placement follows the physical process packaging uptake in A3; release on incineration in A5.

PERM (A3) is reported as renewable primary energy used as material and is calculated from dry mass × net calorific value.

## Cut-off criteria

On the input side all flows entering the system and comprising more than 1% in total mass or contributing more than 1% to primary energy consumption are considered. All inputs used as well as all process-specific waste and process emissions were assessed. For this reason, material streams which were below 1% (by mass) were captured as well. In this manner the cut-off criteria according to the PCR requirements are fulfilled).



# Environmental Product Declaration

## LCA Results - High tensile steel wire for the prestressing of concrete

(ND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

Core environmental impact indicators									
Life Cycle Stage	Impact Category	GWP-total	GWP-fossil	GWP-biogenic	GWP-luluc	ODP	AP	EP-freshwater	
		kg CO <sub>2</sub> eq	kg CFC11 eq	mol H <sup>+</sup> eq	Kg P eq				
Product stage	Raw material supply	A1	2.32E+03	2.32E+03	3.42	1.39	8.83E-09	5.44	1.81E-03
	Transport	A2	3.77	3.73	0.007	0.040	4.52E-13	0.006	1.04E-05
	Manufacturing	A3	250	251	-1.27	0.761	1.64E-09	0.86	1.65E-04
	Total (of product stage)	A1-3	2.57E+03	2.57E+03	2.16	2.19	1.05E-08	6.31	1.99E-03
Construction process stage	Transport	A4	25.2	24.9	0.048	0.264	3.02E-12	0.038	6.92E-05
	Construction	A5	52.5	52.4	1.27	0.054	2.10E-10	0.129	4.22E-05
Use stage	Use	B1	0	0	0	0	0	0	0
	Maintenance	B2	0	0	0	0	0	0	0
	Repair	B3	0	0	0	0	0	0	0
	Replacement	B4	0	0	0	0	0	0	0
	Refurbishment	B5	0	0	0	0	0	0	0
	Operational energy use	B6	0	0	0	0	0	0	0
	Operational water use	B7	0	0	0	0	0	0	0
	<b>%92 Recycling / %8 Landfill Scenario</b>								
End of life	Deconstruction, demolition	C1	2.09	2.09	8.33E-04	6.83E-05	1.62E-13	0.012	2.52E-07
	Transport	C2	48.4	47.8	0.090	0.477	5.75E-12	0.120	1.26E-04
	Waste processing	C3	0	0	0	0	0	0	0
	Disposal	C4	1.23	1.22	3.96E-05	0.005	3.40E-12	0.009	1.82E-06
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-1.49E+03	-1.49E+03	0.721	-0.907	-7.17E-10	-3.74	-6.11E-04
<b>100% Landfill Scenario</b>									
End of life	Deconstruction, demolition	C1	2.09	2.09	8.33E-04	6.83E-05	1.62E-13	0.012	2.52E-07
	Transport	C2	2.23	2.20	0.004	0.023	2.67E-13	0.003	6.11E-06
	Waste processing	C3	0	0	0	0	0	0	0
	Disposal	C4	15.3	15.3	4.95E-04	0.063	4.25E-11	0.108	2.27E-05
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	3.42E+02	3.41E+02	0.294	-0.015	2.16E-10	0.463	2.80E-05
<b>100% Recycling Scenario</b>									
End of life	Deconstruction, demolition	C1	2.09	2.09	8.33E-04	6.83E-05	1.62E-13	0.012	2.52E-07
	Transport	C2	52.4	51.8	0.097	0.516	6.22E-12	0.131	1.36E-04
	Waste processing	C3	0	0	0	0	0	0	0
	Disposal	C4	0	0	0	0	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-1.65E+03	-1.65E+03	0.758	-0.984	-7.98E-10	-4.10	-6.66E-04

GWP-total = Global warming potential, total;

GWP-fossil = Global warming potential, fossil;

GWP-biogenic = Global warming potential, biogenic;

GWP-luluc = Global warming potential, land use and land use change;

ODP = Depletion potential of the stratospheric ozone layer;

AP = Acidification potential, accumulated exceedance; and

EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment



# Environmental Product Declaration

## LCA Results - High tensile steel wire for the prestressing of concrete (cont.)

(ND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

### Core environmental impact indicators

Life Cycle Stage	Impact Category	EP-marine	EP-terrestrial	POCP	ADP-mineral & metals	ADP-fossil	WDP	
		kg N eq	mol N eq	kg NMVOC eq	kg Sb eq	MJ, net calorific value	m³ world eq deprived	
Product stage	Raw material supply	A1	1.33	14.5	4.47	1.01E-04	2.06E+04	121
	Transport	A2	0.002	0.02	4.90E-03	2.54E-07	48.9	0.015
	Manufacturing	A3	0.193	2.08	0.57	1.91E-05	2.65E+03	18.9
	Total (of product stage)	A1-3	1.53	16.6	5.04	1.20E-04	2.33E+04	139.9
Construction process stage	Transport	A4	0.015	0.163	0.033	1.70E-06	327	0.103
	Construction	A5	0.032	0.345	0.103	2.48E-06	480	2.80
Use stage	Use	B1	0	0	0	0	0	0
	Maintenance	B2	0	0	0	0	0	0
	Repair	B3	0	0	0	0	0	0
	Replacement	B4	0	0	0	0	0	0
	Refurbishment	B5	0	0	0	0	0	0
	Operational energy use	B6	0	0	0	0	0	0
	Operational water use	B7	0	0	0	0	0	0

### %92 Recycling / %8 Landfill Scenario

End of life	Deconstruction, demolition	C1	4.08E-03	0.045	0.011	2.94E-08	27.7	0.016
	Transport	C2	0.054	0.580	0.129	3.15E-06	626	0.191
	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	0.002	0.025	0.007	7.57E-08	16.0	0.132
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-0.850	-9.16	-2.83	-2.42E-03	-1.17E+04	-43.8

### 100% Landfill Scenario

End of life	Deconstruction, demolition	C1	4.08E-03	0.045	0.011	2.94E-08	27.7	0.016
	Transport	C2	1.40E-03	0.015	0.003	1.50E-07	28.8	0.009
	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	0.028	0.308	0.085	9.46E-07	200	1.65
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	0.161	1.73	0.563	-2.40E-03	2.19E+03	-31.0

### 100% Recycling Scenario

End of life	Deconstruction, demolition	C1	4.08E-03	0.045	0.011	2.94E-08	27.7	0.016
	Transport	C2	0.058	0.630	0.140	3.41E-06	678	0.207
	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	0	0	0	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-0.938	-10.1	-3.13	-2.42E-03	-1.29E+04	-44.9

ADP-mineral&metals = Abiotic depletion potential for non-fossil resources;

ADP-fossil = Depletion potential of the stratospheric ozone layer;

WDP = Water (user) deprivation potential, deprivation-weighted water consumption.

The results of the three environmental impact indicators above shall be used with care as the uncertainties on these results are high or as there is limited experience with these indicators.

EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment;

EP-terrestrial = Eutrophication potential, accumulated exceedance;

POCP = Formation potential of tropospheric ozone;

PM = Particulate matter.



# Environmental Product Declaration

## LCA Results - High tensile steel wire for the prestressing of concrete (cont.)

(ND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

### Parameters describing environmental impacts

Life Cycle Stage	Impact Category	PM	IRP	ETP-fw	HTP-c	HTP-nc	SQP	
		disease incidence	kBq U <sup>235</sup> eq	CTUe	CTUh	CTUh	dimensionless	
Product stage	Raw material supply	A1	7.94E-05	9.81	5.56E+03	3.00E-06	8.29E-06	1.26E+03
	Transport	A2	5.58E-08	0.009	63.4	8.53E-10	4.81E-08	21.7
	Manufacturing	A3	1.16E-05	1.22	450	5.63E-08	1.39E-06	558
	Total (of product stage)	A1-3	9.11E-05	11.0	6.07E+03	3.06E-06	9.73E-06	1.84E+03
Construction process stage	Transport	A4	3.73E-07	0.060	424	5.70E-09	3.22E-07	145
	Construction	A5	1.85E-06	0.224	138	6.13E-08	2.07E-07	42.1
Use stage	Use	B1	0	0	0	0	0	0
	Maintenance	B2	0	0	0	0	0	0
	Repair	B3	0	0	0	0	0	0
	Replacement	B4	0	0	0	0	0	0
	Refurbishment	B5	0	0	0	0	0	0
	Operational energy use	B6	0	0	0	0	0	0
	Operational water use	B7	0	0	0	0	0	0
<b>%92 Recycling / %8 Landfill Scenario</b>								
End of life	Deconstruction, demolition	C1	7.82E-08	5.77E-04	32.9	5.92E-10	7.53E-09	0.036
	Transport	C2	1.45E-06	0.113	792	1.07E-08	5.87E-07	262
	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	1.08E-07	0.019	13.8	2.13E-10	7.98E-09	3.96
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-5.86E-05	17.8	-2.20E+03	-3.48E-06	1.29E-06	722
<b>100% Landfill Scenario</b>								
End of life	Deconstruction, demolition	C1	7.82E-08	5.77E-04	32.9	5.92E-10	7.53E-09	0.036
	Transport	C2	3.23E-08	0.005	37.4	5.03E-10	2.84E-08	12.8
	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	1.35E-06	0.235	173	2.67E-09	9.98E-08	49.5
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	3.31E-06	-6.28	-3.38E+01	-5.69E-07	-9.18E-07	-399
<b>100% Recycling Scenario</b>								
End of life	Deconstruction, demolition	C1	7.82E-08	5.77E-04	32.9	5.92E-10	7.53E-09	0.036
	Transport	C2	1.57E-06	0.123	858	1.16E-08	6.36E-07	284
	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	0	0	0	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-6.40E-05	19.9	-2.38E+03	-3.73E-06	1.48E-06	819

IRP = Potential human exposure efficiency relative to U235; This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.

HTP-nc = Potential comparative toxic unit for humans; and  
ETP-fw = Potential comparative toxic unit for ecosystems;  
HTP-c = Potential comparative toxic unit for humans;  
SQP = Potential soil quality index.

The results of the four environmental impact indicators above shall be used with care as the uncertainties on these results are high or as there is limited experienced with these indicators.



# Environmental Product Declaration

## LCA Results - High tensile steel wire for the prestressing of concrete (cont.)

(ND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

### Parameters describing resource use

Life Cycle Stage	Impact Category		PERE	PERM	PERT	PENRE	PENRM	PENRT
			MJ	MJ	MJ	MJ	MJ	MJ
Product stage	Raw material supply	A1	1.77E+03	0	1.77E+03	2.06E+04	0	2.06E+04
	Transport	A2	3.6	0	3.6	48.9	0	48.9
	Manufacturing	A3	782	11.8	794	2.65E+03	0	2.65E+03
	Total (of product stage)	A1-3	2.56E+03	11.8	2.57E+03	2.33E+04	0	2.33E+04
Construction process stage	Transport	A4	24.0	0	24.0	327	0	327
	Construction	A5	52.0	0	52.0	480	0	480
Use stage	Use	B1	0	0	0	0	0	0
	Maintenance	B2	0	0	0	0	0	0
	Repair	B3	0	0	0	0	0	0
	Replacement	B4	0	0	0	0	0	0
	Refurbishment	B5	0	0	0	0	0	0
	Operational energy use	B6	0	0	0	0	0	0
	Operational water use	B7	0	0	0	0	0	0

### %92 Recycling / %8 Landfill Scenario

End of life	Deconstruction, demolition	C1	0.056	0	0.056	27.7	0	27.7
	Transport	C2	43.6	0	43.6	626	0	626
	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	3.09	0	3.09	16.0	0	16.0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	1.49E+03	0	1.49E+03	-1.17E+04	0	-1.17E+04

### 100% Landfill Scenario

End of life	Deconstruction, demolition	C1	0.056	0	0.056	27.7	0	27.7
	Transport	C2	2.12	0	2.12	28.8	0	28.8
	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	38.7	0	38.7	200	0	200
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-6.96E+02	0	-6.96E+02	2.19E+03	0	2.19E+03

### 100% Recycling Scenario

End of life	Deconstruction, demolition	C1	0.056	0	0.056	27.7	0	27.7
	Transport	C2	47.2	0	47.2	678	0	678
	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	0	0	0	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	1.68E+03	0	1.68E+03	-1.29E+04	0	-1.29E+04

PERE = Use of renewable primary energy excluding renewable primary energy used as raw materials;

PERM = Use of renewable primary energy resources used as raw materials;

PERT = Total use of renewable primary energy resources;

PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials;

PENRM = Use of non-renewable primary energy resources used as raw materials;

PENRT = Total use of non-renewable primary energy resource



# Environmental Product Declaration

## LCA Results - High tensile steel wire for the prestressing of concrete (cont.)

(ND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

Parameters describing resource use						
Life Cycle Stage	Impact Category	SM	RSF	NRSF	FW	
		kg	MJ net calorific value	MJ net calorific value	m <sup>3</sup>	
Product stage	Raw material supply	A1	217	0	0	4.59
	Transport	A2	0	0	0	0.002
	Manufacturing	A3	0	0	0	0.852
	Total (of product stage)	A1-3	217	0	0	5.44
Construction process stage	Transport	A4	0	0	0	0.012
	Construction	A5	4.35	0	0	0.109
Use stage	Use	B1	0	0	0	0
	Maintenance	B2	0	0	0	0
	Repair	B3	0	0	0	0
	Replacement	B4	0	0	0	0
	Refurbishment	B5	0	0	0	0
	Operational energy use	B6	0	0	0	0
	Operational water use	B7	0	0	0	0
<b>%92 Recycling / %8 Landfill Scenario</b>						
End of life	Deconstruction, demolition	C1	0	0	0	4.04E-04
	Transport	C2	0	0	0	0.021
	Waste processing	C3	0	0	0	0
	Disposal	C4	0	0	0	0.004
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	938	0	0	-2.21
<b>100% Landfill Scenario</b>						
End of life	Deconstruction, demolition	C1	0	0	0	4.04E-04
	Transport	C2	0	0	0	1.02E-03
	Waste processing	C3	0	0	0	0
	Disposal	C4	0	0	0	0.048
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	0	0	0	-1.15
<b>100% Recycling Scenario</b>						
End of life	Deconstruction, demolition	C1	0	0	0	4.04E-04
	Transport	C2	0	0	0	0.023
	Waste processing	C3	0	0	0	0
	Disposal	C4	0	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	1.02E+03	0	0	-2.30

SM = Use of secondary material;

RSF = Use of renewable secondary fuels;

NRSF = Use of non-renewable secondary fuels;

FW = Net use of fresh water



# Environmental Product Declaration

## LCA Results - High tensile steel wire for the prestressing of concrete (cont.)

(ND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

Other environmental information describing waste categories					
Life Cycle Stage	Impact Category	HWD	NHWD	RWD	
		kg	kg	kg	
Product stage	Raw material supply	A1	2.65E-06	36.5	0.106
	Transport	A2	1.77E-09	0.006	6.43E-05
	Manufacturing	A3	2.94E-06	1.55	0.016
	Total (of product stage)	A1-3	5.59E-06	38.1	0.122
Construction process stage	Transport	A4	1.18E-08	0.043	4.30E-04
	Construction	A5	1.12E-07	2.36	0.002
Use stage	Use	B1	0	0	0
	Maintenance	B2	0	0	0
	Repair	B3	0	0	0
	Replacement	B4	0	0	0
	Refurbishment	B5	0	0	0
	Operational energy use	B6	0	0	0
	Operational water use	B7	0	0	0
%92 Recycling / %8 Landfill Scenario					
End of life	Deconstruction, demolition	C1	4.71E-10	0.004	7.85E-06
	Transport	C2	2.26E-08	0.081	8.18E-04
	Waste processing	C3	0	0	0
	Disposal	C4	3.51E-09	80.1	1.70E-04
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-9.32E-03	-20.7	0.170
100% Landfill Scenario					
End of life	Deconstruction, demolition	C1	4.71E-10	0.004	7.85E-06
	Transport	C2	1.04E-09	0.004	3.80E-05
	Waste processing	C3	0	0	0
	Disposal	C4	4.38E-08	1.00E+03	0.002
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-9.33E-03	7.4	-0.060
100% Recycling Scenario					
End of life	Deconstruction, demolition	C1	4.71E-10	0.004	7.85E-06
	Transport	C2	2.45E-08	0.087	8.86E-04
	Waste processing	C3	0	0	0
	Disposal	C4	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-9.32E-03	-23.1	0.190

HWD = Hazardous waste disposed;

NHWD = Non-hazardous waste disposed;

RWD = Radioactive waste disposed



# Environmental Product Declaration

## LCA Results - High tensile steel wire for the prestressing of concrete (cont.)

(ND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

Other environmental information describing output flows – at end of life						
Life Cycle Stage	Impact Category	CRU	MFR	MER	EE	
		kg	kg	kg	MJ per energy carrier	
Product stage	Raw material supply	A1	0	0	0	0
	Transport	A2	0	0	0	0
	Manufacturing	A3	0	0	0	0
	Total (of product stage)	A1-3	0	0	0	0
Construction process stage	Transport	A4	0	0	0	0
	Construction	A5	0	18.4	0	0
Use stage	Use	B1	0	0	0	0
	Maintenance	B2	0	0	0	0
	Repair	B3	0	0	0	0
	Replacement	B4	0	0	0	0
	Refurbishment	B5	0	0	0	0
	Operational energy use	B6	0	0	0	0
	Operational water use	B7	0	0	0	0
%92 Recycling / %8 Landfill Scenario						
End of life	Deconstruction, demolition	C1	0	920	0	0
	Transport	C2	0	0	0	0
	Waste processing	C3	0	0	0	0
	Disposal	C4	0	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	0	0	0	0
100% Landfill Scenario						
End of life	Deconstruction, demolition	C1	0	0	0	0
	Transport	C2	0	0	0	0
	Waste processing	C3	0	0	0	0
	Disposal	C4	0	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	0	0	0	0
100% Recycling Scenario						
End of life	Deconstruction, demolition	C1	0	1.00E+03	0	0
	Transport	C2	0	0	0	0
	Waste processing	C3	0	0	0	0
	Disposal	C4	0	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	0	0	0	0

CRU = Components for reuse;  
MFR = Materials for recycling

MER = Materials for energy recovery;  
EE = Exported Energy



# Environmental Product Declaration

## LCA Results - High tensile steel strand for the prestressing of concrete

(ND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

Core environmental impact indicators									
Life Cycle Stage	Impact Category	GWP-total	GWP-fossil	GWP-biogenic	GWP-luluc	ODP	AP	EP-freshwater	
		kg CO <sub>2</sub> eq	kg CFC11 eq	mol H <sup>+</sup> eq	Kg P eq				
Product stage	Raw material supply	A1	2.32E+03	2.32E+03	3.43	1.39	8.84E-09	5.43	1.81E-03
	Transport	A2	8.23	8.15	0.014	0.075	3.56E-11	0.019	2.16E-05
	Manufacturing	A3	244	246	-2.57	0.747	1.61E-09	0.847	3.00E-04
	Total (of product stage)	A1-3	2.57E+03	2.57E+03	0.874	2.21	1.05E-08	6.30	2.13E-03
Construction process stage	Transport	A4	25.2	24.9	0.048	0.264	3.02E-12	0.038	6.92E-05
	Construction	A5	52.5	52.4	2.40	0.054	2.10E-10	0.128	4.52E-05
Use stage	Use	B1	0	0	0	0	0	0	0
	Maintenance	B2	0	0	0	0	0	0	0
	Repair	B3	0	0	0	0	0	0	0
	Replacement	B4	0	0	0	0	0	0	0
	Refurbishment	B5	0	0	0	0	0	0	0
	Operational energy use	B6	0	0	0	0	0	0	0
	Operational water use	B7	0	0	0	0	0	0	0
	<b>%92 Recycling / %8 Landfill Scenario</b>								
End of life	Deconstruction, demolition	C1	2.09	2.09	8.33E-04	6.83E-05	1.62E-13	0.012	2.52E-07
	Transport	C2	48.4	47.8	0.090	0.477	5.75E-12	0.120	1.26E-04
	Waste processing	C3	0	0	0	0	0	0	0
	Disposal	C4	1.23	1.22	3.96E-05	0.005	3.40E-12	0.009	1.82E-06
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-1.48E+03	-1.48E+03	0.684	-0.886	-7.17E-10	-3.69	-5.99E-04
<b>100% Landfill Scenario</b>									
End of life	Deconstruction, demolition	C1	2.09	2.09	8.33E-04	6.83E-05	1.62E-13	0.012	2.52E-07
	Transport	C2	2.23	2.20	0.004	0.023	2.67E-13	0.003	6.11E-06
	Waste processing	C3	0	0	0	0	0	0	0
	Disposal	C4	15.3	15.3	4.95E-04	0.063	4.25E-11	0.108	2.27E-05
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	350	349	0.257	0.006	2.16E-10	0.512	3.94E-05
<b>100% Recycling Scenario</b>									
End of life	Deconstruction, demolition	C1	2.09	2.09	8.33E-04	6.83E-05	1.62E-13	0.012	2.52E-07
	Transport	C2	52.4	51.8	0.097	0.516	6.22E-12	0.131	1.36E-04
	Waste processing	C3	0	0	0	0	0	0	0
	Disposal	C4	0	0	0	0	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-1.64E+03	-1.64E+03	0.721	-0.963	-7.98E-10	-4.06	-6.55E-04

GWP-total = Global warming potential, total;

GWP-fossil = Global warming potential, fossil;

GWP-biogenic = Global warming potential, biogenic;

GWP-luluc = Global warming potential, land use and land use change;

ODP = Depletion potential of the stratospheric ozone layer;

AP = Acidification potential, accumulated exceedance; and

EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment



# Environmental Product Declaration

## LCA Results - High tensile steel strand for the prestressing of concrete (cont.)

(ND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

### Core environmental impact indicators

Life Cycle Stage	Impact Category	EP-marine	EP-terrestrial	POCP	ADP-mineral & metals	ADP-fossil	WDP	
		kg N eq	mol N eq	kg NMVOC eq	kg Sb eq	MJ, net calorific value	m³ world eq deprived	
Product stage	Raw material supply	A1	1.32	14.5	4.47	1.02E-04	2.06E+04	120.0
	Transport	A2	0.008	0.082	0.019	7.68E-07	118	0.410
	Manufacturing	A3	0.189	2.05	0.56	1.88E-05	2.60E+03	18.6
	Total (of product stage)	A1-3	1.52	16.6	5.04	1.22E-04	2.33E+04	1.39E+02
Construction process stage	Transport	A4	0.015	0.163	0.033	1.70E-06	327	0.103
	Construction	A5	0.032	0.345	0.104	2.49E-06	480	2.80
Use stage	Use	B1	0	0	0	0	0	0
	Maintenance	B2	0	0	0	0	0	0
	Repair	B3	0	0	0	0	0	0
	Replacement	B4	0	0	0	0	0	0
	Refurbishment	B5	0	0	0	0	0	0
	Operational energy use	B6	0	0	0	0	0	0
	Operational water use	B7	0	0	0	0	0	0

### %92 Recycling / %8 Landfill Scenario

End of life	Deconstruction, demolition	C1	4.08E-03	0.045	0.011	2.94E-08	27.7	0.016
	Transport	C2	0.054	0.580	0.129	3.15E-06	626	0.191
	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	0.002	0.025	0.007	7.57E-08	16.0	0.132
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-0.843	-9.09	-2.81	-2.19E-03	-1.16E+04	-40.6

### 100% Landfill Scenario

End of life	Deconstruction, demolition	C1	4.08E-03	0.045	0.011	2.94E-08	27.7	0.016
	Transport	C2	1.40E-03	0.015	0.003	1.50E-07	28.8	0.009
	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	0.028	0.308	0.085	9.46E-07	200	1.65
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	0.168	1.80	0.584	-2.17E-03	2.29E+03	-27.8

### 100% Recycling Scenario

End of life	Deconstruction, demolition	C1	4.08E-03	0.045	0.011	2.94E-08	27.7	0.016
	Transport	C2	0.058	0.630	0.140	3.41E-06	678	0.207
	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	0	0	0	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-0.931	-10.0	-3.10	-2.19E-03	-1.28E+04	-41.7

ADP-mineral&metals = Abiotic depletion potential for non-fossil resources;

ADP-fossil = Depletion potential of the stratospheric ozone layer;

WDP = Water (user) deprivation potential, deprivation-weighted water consumption.

The results of the three environmental impact indicators above shall be used with care as the uncertainties on these results are high or as there is limited experienced with these indicators.

EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment;

EP-terrestrial = Eutrophication potential, accumulated exceedance;

POCP = Formation potential of tropospheric ozone;

PM = Particulate matter.



# Environmental Product Declaration

## LCA Results - High tensile steel strand for the prestressing of concrete (cont.)

(ND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

### Parameters describing environmental impacts

Life Cycle Stage	Impact Category	PM	IRP	ETP-fw	HTP-c	HTP-nc	SQP	
		disease incidence	kBq U <sup>235</sup> eq	CTUe	CTUh	CTUh	dimensionless	
Product stage	Raw material supply	A1	7.93E-05	9.85	5360	3.00E-06	8.30E-06	1260
	Transport	A2	1.82E-07	0.828	118	2.01E-09	9.56E-08	50.9
	Manufacturing	A3	1.14E-05	1.210	4.43E+02	5.50E-08	1.34E-06	576
	Total (of product stage)	A1-3	9.09E-05	11.89	5.92E+03	3.06E-06	9.74E-06	1.89E+03
Construction process stage	Transport	A4	3.73E-07	0.060	424	5.70E-09	3.22E-07	145
	Construction	A5	1.85E-06	0.241	134	6.13E-08	2.07E-07	4.31E+01
Use stage	Use	B1	0	0	0	0	0	0
	Maintenance	B2	0	0	0	0	0	0
	Repair	B3	0	0	0	0	0	0
	Replacement	B4	0	0	0	0	0	0
	Refurbishment	B5	0	0	0	0	0	0
	Operational energy use	B6	0	0	0	0	0	0
	Operational water use	B7	0	0	0	0	0	0
	<b>%92 Recycling / %8 Landfill Scenario</b>							
End of life	Deconstruction, demolition	C1	7.82E-08	5.77E-04	32.9	5.92E-10	7.53E-09	0.036
	Transport	C2	1.45E-06	0.113	792	1.07E-08	5.87E-07	262
	Waste processing	C3						
	Disposal	C4	1.08E-07	0.019	13.8	2.13E-10	7.98E-09	3.96
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-5.76E-05	17.8	-2140	-3.36E-06	1.33E-06	735
<b>100% Landfill Scenario</b>								
End of life	Deconstruction, demolition	C1	7.82E-08	5.77E-04	32.9	5.92E-10	7.53E-09	0.036
	Transport	C2	3.23E-08	0.005	37.4	5.03E-10	2.84E-08	12.8
	Waste processing	C3						
	Disposal	C4	1.35E-06	0.235	173	2.67E-09	9.98E-08	49.5
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	4.36E-06	-6.2	1.68E+01	-4.52E-07	-8.80E-07	-3.86E+02
<b>100% Recycling Scenario</b>								
End of life	Deconstruction, demolition	C1	7.82E-08	5.77E-04	32.9	5.92E-10	7.53E-09	0.036
	Transport	C2	1.57E-06	0.123	858	1.16E-08	6.36E-07	284
	Waste processing	C3						
	Disposal	C4						
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-6.30E-05	19.9	-2330	-3.61E-06	1.52E-06	832

IRP = Potential human exposure efficiency relative to U235; This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.

HTP-nc = Potential comparative toxic unit for humans; and  
ETP-fw = Potential comparative toxic unit for ecosystems;  
HTP-c = Potential comparative toxic unit for humans;  
SQP = Potential soil quality index.

The results of the four environmental impact indicators above shall be used with care as the uncertainties on these results are high or as there is limited experienced with these indicators.



# Environmental Product Declaration

## LCA Results - High tensile steel strand for the prestressing of concrete (cont.)

(ND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

### Parameters describing resource use

Life Cycle Stage	Impact Category		PERE	PERM	PERT	PENRE	PENRM	PENRT
			MJ	MJ	MJ	MJ	MJ	MJ
Product stage	Raw material supply	A1	1.77E+03	0	1.77E+03	2.06E+04	0	2.06E+04
	Transport	A2	27.7	0	27.7	118	0	118
	Manufacturing	A3	786	23.5	810	2.60E+03	0	2.60E+03
	Total (of product stage)	A1-3	2.58E+03	23.5	2.61E+03	2.33E+04	0	2.33E+04
Construction process stage	Transport	A4	24.0	0	24.0	327	0	327
	Construction	A5	52.6	0	52.6	480	0	480
Use stage	Use	B1	0	0	0	0	0	0
	Maintenance	B2	0	0	0	0	0	0
	Repair	B3	0	0	0	0	0	0
	Replacement	B4	0	0	0	0	0	0
	Refurbishment	B5	0	0	0	0	0	0
	Operational energy use	B6	0	0	0	0	0	0
	Operational water use	B7	0	0	0	0	0	0

### %92 Recycling / %8 Landfill Scenario

End of life	Deconstruction, demolition	C1	0.056		0.056	27.7		27.7
	Transport	C2	43.6		43.6	626		626
	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	3.09		3.09	16.0		16.0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	1.50E+03		1.50E+03	-1.16E+04		-1.16E+04

### 100% Landfill Scenario

End of life	Deconstruction, demolition	C1	0.056		0.056	27.7		27.7
	Transport	C2	2.12		2.12	28.8		28.8
	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	38.7		38.7	200		200
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-679		-679	2.29E+03		2.29E+03

### 100% Recycling Scenario

End of life	Deconstruction, demolition	C1	0.056		0.056	27.7		27.7
	Transport	C2	47.2		47.2	678		678
	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	0	0	0	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	1.69E+03		1.69E+03	-1.28E+04		-1.28E+04

PERE = Use of renewable primary energy excluding renewable primary energy used as raw materials;

PERM = Use of renewable primary energy resources used as raw materials;

PERT = Total use of renewable primary energy resources;

PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials;

PENRM = Use of non-renewable primary energy resources used as raw materials;

PENRT = Total use of non-renewable primary energy resource



# Environmental Product Declaration

## LCA Results - High tensile steel strand for the prestressing of concrete (cont.)

(ND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

Parameters describing resource use						
Life Cycle Stage	Impact Category	SM	RSF	NRSF	FW	
		kg	MJ net calorific value	MJ net calorific value	m <sup>3</sup>	
Product stage	Raw material supply	A1	217	0	0	4.59
	Transport	A2	0	0	0	0.020
	Manufacturing	A3	0	0	0	0.850
	Total (of product stage)	A1-3	217	0	0	5.46
Construction process stage	Transport	A4	0	0	0	0.012
	Construction	A5	4.35	0	0	0.110
Use stage	Use	B1	0	0	0	0
	Maintenance	B2	0	0	0	0
	Repair	B3	0	0	0	0
	Replacement	B4	0	0	0	0
	Refurbishment	B5	0	0	0	0
	Operational energy use	B6	0	0	0	0
	Operational water use	B7	0	0	0	0
<b>%92 Recycling / %8 Landfill Scenario</b>						
End of life	Deconstruction, demolition	C1	0	0	0	4.04E-04
	Transport	C2	0	0	0	0.021
	Waste processing	C3	0	0	0	0
	Disposal	C4	0	0	0	0.004
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	938	0	0	-2.08
<b>100% Landfill Scenario</b>						
End of life	Deconstruction, demolition	C1	0	0	0	4.04E-04
	Transport	C2	0	0	0	1.02E-03
	Waste processing	C3	0	0	0	0
	Disposal	C4	0	0	0	0.048
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	0	0	0	-1.01
<b>100% Recycling Scenario</b>						
End of life	Deconstruction, demolition	C1	0	0	0	4.04E-04
	Transport	C2	0	0	0	0.023
	Waste processing	C3	0	0	0	0
	Disposal	C4	0	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	1.02E+03	0	0	-2.17

SM = Use of secondary material;

RSF = Use of renewable secondary fuels;

NRSF = Use of non-renewable secondary fuels;

FW = Net use of fresh water



# Environmental Product Declaration

## LCA Results - High tensile steel strand for the prestressing of concrete (cont.)

(ND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

Other environmental information describing waste categories					
Life Cycle Stage	Impact Category	HWD	NHWD	RWD	
		kg	kg	kg	
Product stage	Raw material supply	A1	2.65E-06	36.40	0.106
	Transport	A2	4.38E-08	0.036	5.03E-03
	Manufacturing	A3	2.90E-06	1.53	0.016
	Total (of product stage)	A1-3	5.59E-06	38.0	0.127
Construction process stage	Transport	A4	1.18E-08	0.043	4.30E-04
	Construction	A5	1.12E-07	2.36	0.003
Use stage	Use	B1	0	0	0
	Maintenance	B2	0	0	0
	Repair	B3	0	0	0
	Replacement	B4	0	0	0
	Refurbishment	B5	0	0	0
	Operational energy use	B6	0	0	0
	Operational water use	B7	0	0	0
%92 Recycling / %8 Landfill Scenario					
End of life	Deconstruction, demolition	C1	4.71E-10	0.004	7.85E-06
	Transport	C2	2.26E-08	0.081	8.18E-04
	Waste processing	C3	0	0	0
	Disposal	C4	3.51E-09	80.1	1.70E-04
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-8.44E-03	-20.8	0.171
100% Landfill Scenario					
End of life	Deconstruction, demolition	C1	4.71E-10	0.004	7.85E-06
	Transport	C2	1.04E-09	0.004	3.80E-05
	Waste processing	C3	0	0	0
	Disposal	C4	4.38E-08	1.00E+03	0.002
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-8.45E-03	7.3	-0.059
100% Recycling Scenario					
End of life	Deconstruction, demolition	C1	4.71E-10	0.004	7.85E-06
	Transport	C2	2.45E-08	0.087	8.86E-04
	Waste processing	C3	0	0	0
	Disposal	C4	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-8.44E-03	-23.2	0.191

HWD = Hazardous waste disposed;

NHWD = Non-hazardous waste disposed;

RWD = Radioactive waste disposed



# Environmental Product Declaration

## LCA Results - High tensile steel strand for the prestressing of concrete (cont.)

(ND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

Other environmental information describing output flows – at end of life						
Life Cycle Stage	Impact Category	CRU	MFR	MER	EE	
		kg	kg	kg	MJ per energy carrier	
Product stage	Raw material supply	A1	0	0	0	0
	Transport	A2	0	0	0	0
	Manufacturing	A3	0	0	0	0
	Total (of product stage)	A1-3	0	0	0	0
Construction process stage	Transport	A4	0	0	0	0
	Construction	A5	0	18.4	0	0
Use stage	Use	B1	0	0	0	0
	Maintenance	B2	0	0	0	0
	Repair	B3	0	0	0	0
	Replacement	B4	0	0	0	0
	Refurbishment	B5	0	0	0	0
	Operational energy use	B6	0	0	0	0
	Operational water use	B7	0	0	0	0
<b>%92 Recycling / %8 Landfill Scenario</b>						
End of life	Deconstruction, demolition	C1	0	920	0	0
	Transport	C2	0	0	0	0
	Waste processing	C3	0	0	0	0
	Disposal	C4	0	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	0	0	0	0
<b>100% Landfill Scenario</b>						
End of life	Deconstruction, demolition	C1	0	0	0	0
	Transport	C2	0	0	0	0
	Waste processing	C3	0	0	0	0
	Disposal	C4	0	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	0	0	0	0
<b>100% Recycling Scenario</b>						
End of life	Deconstruction, demolition	C1	0	1.00E+03	0	0
	Transport	C2	0	0	0	0
	Waste processing	C3	0	0	0	0
	Disposal	C4	0	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	0	0	0	0

CRU = Components for reuse;

MFR = Materials for recycling

MER = Materials for energy recovery;

EE = Exported Energy



# Environmental Product Declaration

## Scenarios and additional technical information

Scenarios and additional technical information			
Scenario	Parameter	Units	Results
Module A4 Transport to the Building Site	On leaving the manufacturing factory the high-tensile prestressed steel strand products are transported to the construction site, including provision of all materials and products. Road transport distance to site is assumed to be 350 km. Only the one-way distance is considered as it is assumed that the logistics companies will optimise their distribution and not return empty in modules beyond A3.		
	Truck trailer - Fuel	litre/km	1.56
	Distance	km	350
	Capacity utilisation (including empty returns)	%	61
Module A5 Installation in the Building	Bulk density of transported products	kg/m <sup>3</sup>	7850
	Installation in the building; including provision of all materials, products, and energy, as well as waste processing up to the end-of-waste state or disposal of final residues during the construction stage. Installation of the product into the building is assumed to result in 10% wastage (determined based on typical installation losses reported by the WRAP Net Waste Tool [WRAP 2017]). It is assumed that fabrication requires 15.34 kWh/tonne finished product, and that there is a 2% wastage associated with this process.		
	Packaging is assumed to be 100% incinerated at installation. In alignment with EN 15804+A2 (EF 3.1), biogenic CO <sub>2</sub> uptake associated with packaging is declared in A1–A3 (negative sign), and the corresponding release is declared in A5 (positive sign) with equal magnitude.		
	Ancillary materials for installation - Waste material from fabrication, losses per tonne of construction steel forms	%	2
Module B2 Maintenance	Energy Use - Energy per tonne required to fabricate construction steel forms	kWh	15.34
	Waste materials from installation wastage	%	10
	No maintenance required.		
Module B3 Repair	No repair process required.		
Module B4 Replacement	No replacement considerations required.		
Module B5 Refurbishment	No refurbishment process required.		
Reference Service Life	High-tensile prestressed steel strand products for the prestressing of concrete are used in the main building structure so the reference service life will equal the lifetime of the building. BS EN 1990 specifies "building structures and other common structures" as having a lifetime of 50 years. On this basis, the RSL for this EPD is assumed to be 50 years.		
Module B6 Use of Energy	No energy required during use stage related to the operation of the building.		
Module B7 Use of Water	No water required during use stage related to the operation of the building.		
Modules C1 to C4 End of life	The end-of-life stage starts when the construction product is replaced, dismantled or deconstructed from the building or construction works and does not provide any further function. The recovered steel is transported for recycling while a small portion is assumed to be unrecoverable and remains in the rubble which is sent to landfill. 92% of the high-tensile prestressed steel strand is assumed to be recycled and 8% is sent to landfill [STEELCONSTRUCTION.INFO 2012]. The EPD covers transport to, and end-of-life in China.		
	Once steel scrap is generated through the deconstruction activities on the demolition site it is considered to have reached the "end of waste" state. No further processing is required so there are no impacts associated with this module. Hence no impacts are reported in module C3.		
	Waste for recycling - Recovered steel from crushed concrete	%	92
	Waste for energy recovery - Energy recovery is not considered for this study as most end-of-life steel scrap is recycled, while the remainder is landfilled	-	-
	Waste for final disposal - Unrecoverable steel lost in crushed concrete and sent to landfill	%	8
	Portion of energy assigned to rebar from energy required to demolish building, per tonne	MJ	24
	Transport to waste processing by Truck - Fuel consumption	litre/km	1.56
	Transport to waste processing by Truck – Distance	km	463
	Transport to waste processing by Truck – Capacity utilisation	%	61
	Transport to waste processing by Truck – Density of Product	kg/m <sup>3</sup>	7810
	Transport to waste processing by Container ship - Fuel consumption	litre/km	0.0041
	Transport to waste processing by Container ship - Distance	km	158



# Environmental Product Declaration

## Scenarios and additional technical information

Scenario	Parameter	Units	Results
	Transport to waste processing by Container ship – Capacity utilisation	%	53
	Transport to waste processing by Container ship – Density of Product	kg/m <sup>3</sup>	7810
Module D	It is assumed that 92% of the steel used in the structure is recovered for recycling, while the remainder is landfilled. "Benefits and loads beyond the system boundary" (module D) accounts for the environmental benefits and loads resulting from net steel scrap that is used as raw material in the steel plant and that is collected for recycling at end of life. The balance between total scrap arisings recycled from fabrication, installation and end of life and scrap consumed by the manufacturing process (internally sourced scrap is not included in this calculation). These benefits and loads are calculated by including the burdens of recycling and the benefit of avoided primary production.		
	A large amount of net scrap is generated over the life cycle as the primary production route (with BF/BOF) is primarily from virgin sources and there is a very high end of life recycling rate for this product. Benefits and loads associated with this scrap are calculated by including the burdens of recycling process and accounting for the avoided primary production. As a result, module D reports the credits associated with the scrap output.		
	The resulting scrap credit/burden is calculated based on the global "value of scrap" approach (/worldsteel 2011).		
	Recycled Content	kg	136
	Re-used Content	kg	0
	Recovered for recycling	kg	920
	Recovered for re-use	kg	0
	Recovered for energy	kg	0



## Summary, comments and additional information

### Interpretation

Iron ore based high tensile steel wire and strand products for the prestressing of concrete of Tianjin NTS Flourish Co., Ltd is made via the primary production route. The bulk of the environmental impacts and primary energy demand is attributed to the manufacturing phase, covered by information modules A1-A3 of EN 15804:2012+A2:2019/AC2021.

The interpretation of the results has been carried out considering the methodology- and data-related assumptions and limitations declared in the EPD. This interpretation section focuses on the environmental impact categories as well as the primary energy demand indicators only.

#### Global Warming Potential (GWP)

The majority of the life cycle GWP impact occurs in the production phase (A1-A3). A1-A3 impacts account for 95.21% overall life cycle impacts for this category. The most significant contributions to production phase impacts are the upstream production of raw materials used in the steelmaking process, generation/supply of electricity and the production/use of fuels on site. Fabrication, installation and the end-of-life processes covered in C1-C4 make a minimal contribution to GWP. For overall climate change impacts, carbon dioxide emissions account for the majority of impacts with methane being the second most significant contributor.

#### Ozone Depletion Potential (ODP)

The majority of impacts are associated with the production phase (A1-3). Significant contributions to production phase impact come from the emission of ozone depleting substances during the upstream production of raw materials/pre-products as well as those arising from electricity production. Module D shows a very small credit even though scrap burdens are being assessed in this phase. This is explained because ODP emissions are linked to grid electricity production used.

#### Acidification Potential (AP)

Acidification potential is generally driven by the production of sulphur dioxide and nitrogen oxides through the combustion of fossil fuels, particularly coal and crude oil products. The majority of the lifecycle AP impact occurs in the production phase (A1-A3), similar to GWP. The major contributors to production phase AP impacts comes from energy resources used in the production of the raw materials and pre-products for the steelmaking process and from transportation. Fabrication, installation and the end-of-life processes classed under C1-C4 make minimal contributions.

#### Eutrophication Potential (EP)

Eutrophication is driven by nitrogen and phosphorus containing emissions and as with GWP and AP is often strongly linked with the use of fossil fuels. The major eutrophication impacts occur in the production phase (A1-A3). Significant contributions to production phase impact comes from the production of raw materials and transport. Fabrication, installation and the end-of-life processes classed under C1-C4 again make minimal contributions.

#### Photochemical Ozone Creation Potential (POCP)

POCP tends to be driven by emissions of carbon monoxide, nitrogen oxides (NOx), sulphur dioxide and NMVOCs. The production phase is the dominant phase of the lifecycle with regards to POCP impacts. Again, these are all emissions commonly associated with the combustion of fuels. Significant contributors to POCP are the upstream production of raw materials/pre-products and transport, directly linked to fossil fuel combustion. It should be noted that the impacts for steel recycling in module D is almost of the same magnitude as the production phase impacts.



# Environmental Product Declaration

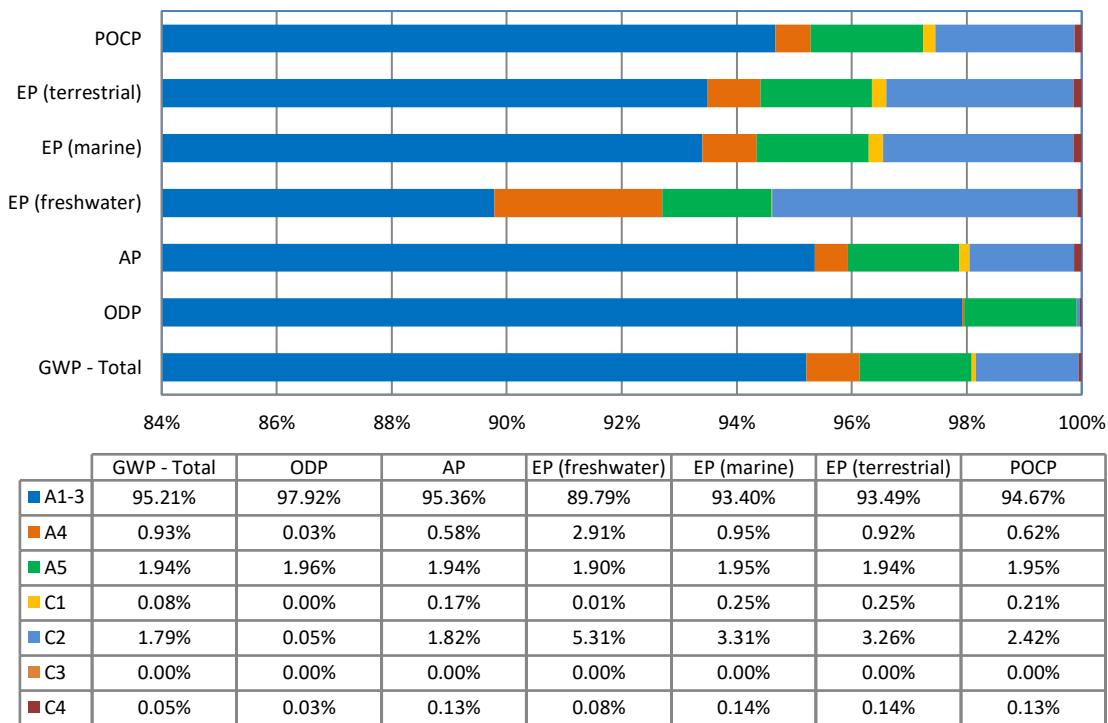


Figure 1 - shows the relative contribution of each life cycle stage to different environmental indicators for the high tensile steel strand products for the prestressing of concrete manufactured by the primary production route (iron ore)

## Information on biogenic carbon content

Biogenic carbon content	kg C
Biogenic carbon content in product (high tensile steel wire for the prestressing of concrete)	0
Biogenic carbon content in product (high tensile steel strand for the prestressing of concrete)	0
Biogenic carbon content in accompanying packaging (high tensile steel wire for the prestressing of concrete)	0.35
Biogenic carbon content in accompanying packaging (high tensile steel strand for the prestressing of concrete)	0.65

NOTE 1 kg biogenic carbon is equivalent to 44/12 kg of CO<sub>2</sub>

## References

BSI. Sustainability of construction works – Environmental product declarations – Core rules for the product category of construction products. EN 15804:2012+A2:2019/AC2021. London, BSI, 2019.

BSI. Environmental labels and declarations. Self-declared environmental claims (Type II environmental labelling). BS EN ISO 14021:2016+A1:2021. London, BSI, 2022

BSI. Environmental labels and declarations – Type III Environmental declarations – Principles and procedures. BS EN ISO 14025:2010 (exactly identical to ISO 14025:2006). London, BSI, 2010.



# Environmental Product Declaration

BSI. Environmental management – Life cycle assessment – Principles and framework. BS EN ISO BS EN ISO 14040:2006+A1:2020. London, BSI, 2020.

BSI. Environmental management – Life cycle assessment – requirements and guidelines. BS EN ISO 14044:2006+A2:2020. London, BSI, 2020.

BSI. Sustainability of construction works. Data quality for environmental assessment of products and construction work. Selection and use of data. BS EN 15941:2024. London, 2024.

BSI. Sustainability of construction works. Environmental product declarations. Communication format business-to-business. BS EN 15942:2021. London, 2021.

BSI. Eurocode. Basis of structural and geotechnical design. BS EN 1990:2023. London, 2023.

Demolition Energy Analysis of Office Building Structural Systems, Athena Sustainable Materials Institute, 1997

The Concrete Society, [Design working life \(concrete.org.uk\)](http://Design working life (concrete.org.uk))

EN 16449:2014. Wood and wood-based products — Calculation of the biogenic carbon content of wood and conversion to carbon dioxide. CEN, 2014.

IPCC. 2006 IPCC Guidelines for National Greenhouse Gas Inventories – Volume 4 (AFOLU). 2006

European Commission JRC. Updated characterisation and normalisation factors for the Environmental Footprint 3.1 method (EUR 31414 EN). Publications Office of the European Union, 2023.

CARES: Product Category Rules (PCR) for Type III Environmental Product Declaration (EPD) of Semi-Finished and Finished Steel Products, Issue/Revision Date: February 2025

LCA for Experts (LCA FE) Software System and Managed Life cycle Content (MLC) Database for Life Cycle Engineering, Sphera Solutions GmbH, Leinfelden-Echterdingen, <https://lcadatabase.sphera.com/>, 2025

International Energy Agency (IEA) – Electricity grids and secure energy transitions: Enhancing the foundations of resilient, sustainable and affordable power systems, 2023), <https://iea.blob.core.windows.net/assets/ea2ff609-8180-4312-8de9-494bcf21696d/ElectricityGridsandSecureEnergyTransitions.pdf>

Kreßig, J. und J. Kümmel (1999): Baustoff-Ökobilanzen. Wirkungsabschätzung und Auswertung in der Steine-Erden-Industrie. Hrsg. Bundesverband Baustoffe Steine + Erden e.V.

U.S. Geological Survey, Mineral Commodity Summaries, Iron and Steel Slag, January 2014

SteelConstruction.info; The recycling and reuse survey, 2012  
[http://www.steelconstruction.info/The\\_recycling\\_and\\_reuse\\_survey](http://www.steelconstruction.info/The_recycling_and_reuse_survey)

Sustainability of construction works - Environmental product declarations - Methodology for selection and use of generic data; German version CEN/TR 15941

REGULATION (EU) No 305/2011 OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 9 March 2011 laying down harmonised conditions for the marketing of construction products and repealing Council Directive 89/106/EEC

WRAP Net Waste Tool, Waste & Resources Action Programme (WRAP), 2013 [No longer available; formerly at [www.wrap.org.uk/nwtool](http://www.wrap.org.uk/nwtool)]

worldsteel Association - Life cycle inventory methodology report for steel products, 2017

CARES Post Tensioning Systems for Concrete Structures Scheme Appendix PT8 - Quality and operations assessment schedule for high tensile steel wire and strand for the prestressing of concrete -  
<https://www.carescertification.com/certified-companies/search> - Certificate number of conformance to BS 5896 at the time of LCA study – 231104



# Environmental Product Declaration

BS 5896:2012 High tensile steel wire and strand for the prestressing of concrete. Specification

ASTM A416/A416M-18 Standard Specification for Low-Relaxation, Seven-Wire Steel Strand for Prestressed Concrete

GB/T 5224-2023 Steel stand for prestressed concrete

ISO 6934-1:1991 Steel for the prestressing of concrete Part 1: General requirements

ISO 6934-4:2020 Steel for the prestressing of concrete Part 4: Strand

prEN 10138-1 Prestressing steels - Part 1: Wire

prEN 10138-2 Prestressing steels - Part 2: Strand

AS/NZS 4672.1:2007 Steel prestressing materials Part 1: General requirements

JIS G 3536:2014 Steel wires and strands for prestressed concrete